

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging of formations.

Kiowa County. Sec. 26 Twp. 28 Rge. 17 (E) W. (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. C. SW. NW  
Lease Owner Bishop Oil Company  
Lease Name Evans Well No. 1  
Office Address 901 Brown Bldg., Wichita 2, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry  
Date well completed December 2 1947  
Application for plugging filed January 13 1948  
Application for plugging approved January 14 1948  
Plugging commenced January 24 1948  
Plugging completed February 20 1948  
Reason for abandonment of well or producing formation Dry

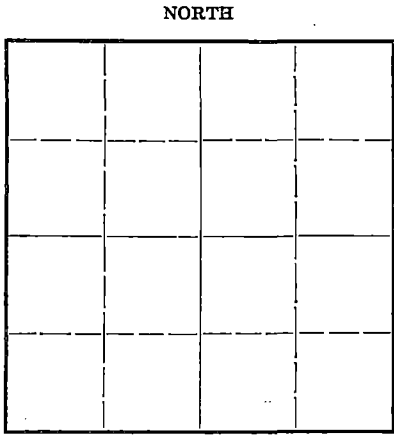

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes


Name of Conservation Agent who supervised plugging of this well Mr. Charles Stough  
Producing formation Depth to top Bottom Total Depth of Well 5205 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

Formation	Content	From Top	To	Size	Put In	Pulled Out
Lansing	Dry	4233		10 3/4"	1105	None
Conglomerate	"	4780				
Viola	"	4916				
Simpson	"	5044				
Arb	"	5108		5 1/2"	4878	3142

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole filled to top of perforations with mud. Bridged hole at 4760' and dumped 5 sax cement. Filled hole with mud to 1100', bridged hole at 1100' and dumped 15 sax cement. Filled hole with mud 20', dumped 10 sax cement.

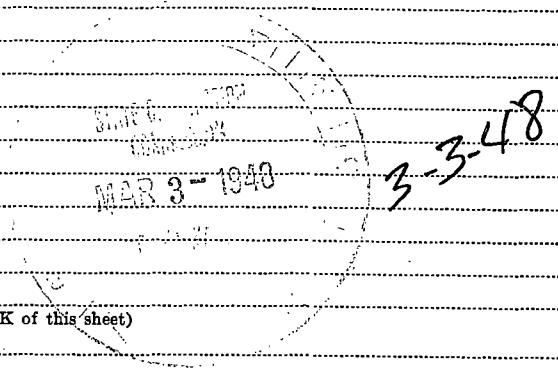

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to  
Address

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Carl Todd (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Carl Todd

901 Brown Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of March, 1948

My commission expires April 25, 1950 Della Lee Fisher Notary Public.

PLUGGING  
FILE SEC 26 T 28 R 17 C  
LINE 40