


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

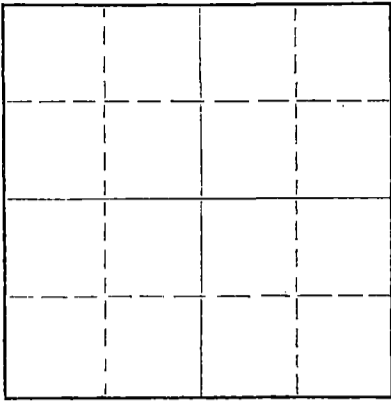

Locate well correctly on above
Section Plat

Kiowa County. Sec. 16 Twp. 28 Rge. 17 (~~XXX~~) (W)
Location as "NE/CNW%SW%" or footage from lines C NE NE
Lease Owner Prime Drilling Company, et al
Lease Name Welsch-Cronic No. Well No. 1
Office Address 814 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 31 19 60
Application for plugging filed July 31 19 60
Application for plugging approved July 31 19 60
Plugging commenced July 31 19 60
Plugging completed July 31 19 60
Reason for abandonment of well or producing formation no oil or gas found
in commercial quantities
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well W. L. Lackamp, Jr.
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4868 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	415'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with extra heavy rotary mud from total depth to 400'. Set Plug #1 at 400' cemented with 20 sacks cement.
Filled hole with extra heavy rotary mud from Plug #1 to 35'.
Set Plug #2 at 35' with 10 sacks cement.

Plugged rathole with 2 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

AUG 5 1960

CONSERVATION DIVISION
Wichita, Kansas

8-5-60

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Prime Drilling Company
Address 814 Union Center, Wichita, Kansas


STATE OF Kansas, COUNTY OF Sedgwick, ss.
R. R. McNicol (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. R. McNicol
814 Union Center, Wichita, Kansas
(Address)

Subscribed and sworn to before me this 4th day of August, 1960

Darlene May
Darlene May Notary Public.

My commission expires September 30, 1963



ROTARY DRILLING LOG

15-097-00084-0000

OPERATOR: Prime Drilling Company, et al
WELSCH-CRONIC NO. 1
C NE NE Section 16-28-17W,
Kiowa County, Kansas

CONTRACTOR: Prime Drilling Company
COMM: 7-8-60
COMP: 7-31-60

Surface Casing: Set 8-5/8" surface casing at 415' cemented with 275 sacks cement

Formations:

Shale & Sand	140'
Shale & Shells	415'
Red Bed	1055'
Anhydrite	1070'
Shale & Shells	2075'
Shale & Lime	2190'
Lime	2813'
Lime & Shale	3515'
Lime	4770'
Lime & Shale	4778'
Lime	4798'
Cherty Lime	4817'
Lime & Shale	4868'
Rotary Total Depth(D&A)	4868'

We certify the above log is true and correct to the best of our knowledge and belief.

PRIME DRILLING COMPANY

R. R. McNicol

R. R. McNicol

STATE OF KANSAS
STATE GEOLOGICAL SURVEY

AUG 5 1960

REGISTRATION DIVISION
Topeka, Kansas