


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

NORTH

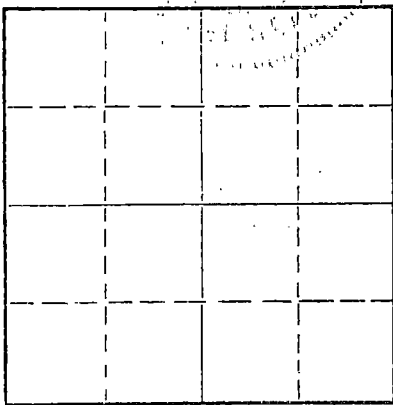

Locate well correctly on above
Section Plat

Kingman County. Sec. 14 Twp. 29 Rge. 9W (E) (W)

Location as "NE/CNW/SW" or footage from lines NE SW NW
Lease Owner A. Scott Ritchie
Lease Name Mueller A#2 Well No.
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 6/15/70 19
Plugging completed 6/22/70 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4300 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	310	none
				5 1/2"	4507'	1899'
RECEIVED STATE CORPORATION COMMISSION JUL 9 1970 CONSERVATION DIVISION Wichita, Kansas						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 4300', ran sand to 4190' and checked hole, sand bridge at 1200'. Loaded hole, ran sand pump, pushed plug down to 1450', loaded hole, pushed plug to 1500', checked hole, plug went to bottom, dumped 5 sacks of cement. Shot pipe at 3423, 3297, 3197, 3098, 2998, 2911, 2686, 2523, 2361, worked pipe loose and pulled 4 joints. Well blew in, Globe pumped mud and water to kill gas, pumped in 40 sacks of cement, left top of cement at 2197, shot pipe at 1993', 1770', pulled pipe. Pumped 15 sacks mud and 150 sacks of cement. to plug well.

180

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight CHASE, KANSAS

(Address) June 19 70

SUBSCRIBED AND SWORN to before me this 30th day of June, 19 70



My commission expires 2/15/71

Notary Public.