

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Kiowa County. Sec. 31 Twp. 29S Rge. 16W ~~(E)~~ ~~(W)~~

Location as "NE/CNW/SW" or footage from lines. 550' fr. lease line approx. C NE NE

Lease Owner Brunson-Spines

Lease Name Kell Well No. 1

Office Address 800 Vickers-KSB&T Bldg., Wichita, Ks. 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 9-4 1971

Application for plugging filed 1971

Application for plugging approved 9-4 1971


Plugging commenced 9-4 1971

Plugging completed 9-4 1971

Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

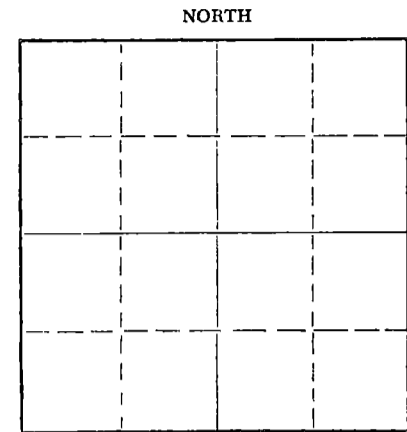

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Russ Biberstein, Attica, Ks.

Producing formation Miss. Depth to top _____ Bottom _____ Total Depth of Well 4734 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	300"	0
				Cemented with 300 sacks		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set 1st plug @ 400' with 50 sx. cement, 2nd plug @ 40' with hulls, plug with 10 sx. cement.

RECEIVED
STATE CORPORATION COMMISSION
SEP 20 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones, Inc.

Address 830 Sutton Place, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.


GABBERT-JONES (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature] Exec. Vice President
GABBERT-JONES, INC. 830 Sutton Place
Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 14 day of September, 1971

[Signature] Notary Public.

My commission expires Nov 29 1971



GABBERT-JONES, INC.
 WICHITA, KANSAS
 DRILLERS' WELL LOG

RECEIVED
 STATE CORPORATION COMMISSION
 SEP 20 1971
 CONSERVATION DIVISION
 Wichita, Kansas


KELL #1
 C NE NE, Section 31-29S-16W
 Kiowa County, Kansas

Commenced: August 21, 1971
 Completed: September 4, 1971

OPERATOR: BRUNSON-SPINES

DEPTH		FORMATION	REMARKS
From	To		
0	30	Surface Clay	Ran 14 joints of used 8 5/8"
30	320	Shale and Shells	Casing set @ 300', cemented
320	1220	Shale and Redbed	w/300 sks common. 3% CC
1220	2035	Shale and Shells	P.D. 2:30 PM 8/22/71
2035	4140	Lime and Shale	Cement Cir.
4140	4715	Lime	Job by Halliburton
4715	4734	Lime and Chert	
4734	TD		Dry and Abandoned


I, James S. Sutton II, certify this is a correct copy of the Drillers' Log for the well drilled in the C NE NE, Section 31-29S-16W, Kiowa County, Kansas, to the best of my knowledge and belief.


 James S. Sutton II

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 7th day of September, 1971, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.


 Marjorie Hall, Notary Public

My commission expires
 Nov. 29, 1971