




STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Sedgwick County, Sec. 31 Twp 27 Rge. 4 (E) (W)

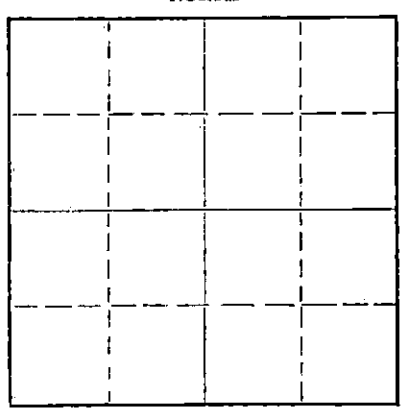

Locate well correctly on above Section Plat

Location as "NE/CNW/SW" or footage from lines SW NE SW
Lease Owner Shallow Water Refining Company
Lease Name Bartholmew TR14 #10 Well No. _____
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 11/1/67 _____ 19____
Plugging completed 11/4/67 _____ 19____
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Justice H. Scott
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4143 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4"	220'	none
				7"	4132'	1193'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 3793', ran sand to 3725' and dumped 6 sacks of cement.
Had hole loaded, shot pipe at 3390' and 3294'. Pulled pipe.
Mudded from 350 to 250' and set 20' rock bridge. Dumped 5 yards of ready mix.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
NOV 8 1967
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY, INC.
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of November, 1967

My commission expires February 15, 1971

Margaret Melcher
Notary Public.

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
500 E. Murdock, Wichita, Kansas


Tract 14 #10
COR

Company - WESTGATE-GREENLAND OIL CO.
Farm - Davis No. 10

SEC. 31 T. 27 R. 27
SW NE SW

Total Depth. 4142
Comp. 4-11-51 Comp. 5-14-51
Shot or Treated.
Contractor. Jackson Drlg.
Issued. 7-23-51

County. Sedgwick
KANSAS



CASING:
10 5/2" 220' com. w/135 sx.
7" 4132' com. w/100 sx.

Elevation. 1417

Production. Pot. 124 bbls. no wtr.

Figures Indicate Bottom of Formations.

surface soil & sand	70
shale & red bed	135
shale & shells	170
salt & shale	710
lime & shale	2445
shale, lime brkn	2470
lime & shale	2895
lime	2915
K.C. lime	2970
lime	3045
K.C. lime	3090
lime	3165
K.C. lime	3205
lime	3365
lime & shale	3581
shale & lime brkn	3588
shale & lime	3711
Miss. lime	3722
lime	3775
lime & chert	3889
lime	3939
shale & lime	4030
shale	4086
sand & chert	4096
shale	4109
Viola	4151
sand	4137
sand	4142
Total Depth	

Tops:	
Brown lime	2844
Lansing	2891
Brown K.C.	3327
Miss.	3708
Viola	4108
Simpson	4115
Simpson sand	4130

Prod. formation Mississippi
All Meas. from top of D.F.

Lane Wells perf. casing 59 holes from 3772-
3738. P.B. 3793
Lane Wells perf. casing 71 holes from 4131-
4089 2000 gals. Dowell Service,
1000 gals. Dowell Service. 10 bbls. per hr.

RECEIVED
STATE CORPORATION COMMISSION
AUG 23 1967
CONSERVATION DIVISION
Wichita, Kansas