

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-21249-00-00
Spot: NESESW Sec/Twnshp/Rge: 5-28S-15W
960 feet from S Section Line, 240 feet from E Section Line
Lease/Unit Name: HEALY FAMILY FARMS Well Number: 2
County: PRATT Total Vertical Depth: 4730 feet

Operator License No.: 5893
Op Name: PRATT WELL SERVICE, INC.
Address: PO BOX 847
PRATT, KS 67124

Production Casing Size: 4.5 feet: 4729
Surface Casing Size: 8.625 feet: 463

\$153.73

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 05/02/2003 9:25 AM
Plug Co. License No.: 5893 Plug Co. Name: PRATT WELL SERVICE, INC.
Proposal Rcvd. from: KEN GATES Company: PRATT WELL SERVICE, INC. Phone: (620) 672-2531

Proposed Plugging Method: CIBP @ 4570' WITH 2 SX CMT. PLUG AT 800' WITH 10 SX GEL & 50 SX CMT. PLUG AT 500' WITH 50 SX CMT. PLUG AT 0-40' WITH 20 SX CMT.

Plugging Proposal Received By: SCOTT ALBERG WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 05/02/2003 10:30 AM KCC Agent: SCOTT ALBERG

Actual Plugging Report:


PERFS AT 4620-26'. CIBP @ 4570' WITH 2 SX CMT. 1ST PLUG SPOT 10 SX GEL & 50 SX CMT AT 800'. 2ND PLUG SPOT 50 SX CMT AT 500'. 3RD PLUG SPOT 20 SX CMT AT 0-40'. GOOD CIRCULATION.

RECEIVED
5-13-03
MAY 13 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 2250' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

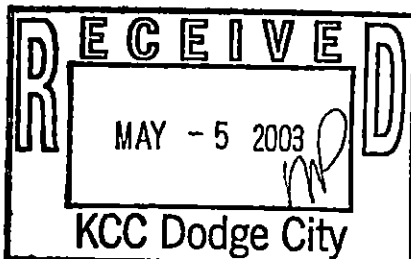

Signed _____

(TECHNICIAN)

INVOICED
DATE 5-14-03
INV. NO. 2003061522