

STATE OF KANSAS
KANSAS CORPORATION COMMISSION
CONSERVATION DIVISION
130 South Market - Room 2078
Wichita, Kansas 67202

10
Lib. 59.8A

FORM CP-1 (3/92)

WELL PLUGGING APPLICATION FORM
(PLEASE TYPE FORM and File ONE Copy)

API # NA (Identifier number of this well). This must be listed for wells drilled since 1967; if no API# was issued, indicate spud or completion date.

WELL OPERATOR Panhandle Eastern Pipe Line Company KCC LICENSE # NA

ADDRESS 1701^N Kansas (owner/company name) Box 828 CITY Garden City (operator's)

STATE Kansas ZIP CODE 67901 CONTACT PHONE # (316) 624-7241

LEASE _____ WELL# 59.8A SEC. 7 T. 29 R. 22W (East/West)

SPOT LOCATION/QQQQ _____ COUNTY Ford

3650 N FEET (in exact footage) FROM (S)/N (circle one) LINE OF SECTION (NOT Lease Line)

5250 W FEET (in exact footage) FROM (E)/W (circle one) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL _____ GAS WELL _____ D&A _____ SWD/ENHR WELL _____ DOCKET# NA

CONDUCTOR CASING SIZE _____ SET AT _____ CEMENTED WITH None SACKS

SURFACE CASING SIZE 9" dia. borehole SET AT 250' CEMENTED WITH None SACKS

PRODUCTION CASING SIZE NA SET AT _____ CEMENTED WITH _____ SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS: NA

ELEVATION 2515 GL T.D. 250' PBDT _____ ANHYDRITE DEPTH _____
(G.L./K.B.) (Stone Corral Formation)

CONDITION OF WELL: GOOD _____ POOR _____ CASING LEAK _____ JUNK IN HOLE _____

PROPOSED METHOD OF PLUGGING 250' depth borehole. 9" dia. with 20 Durion type "M" anodes.

Coke breeze backfill surrounding an 1" plastic vent pipe. A cathodic protection well.

Plugging per KCCDist. 1 155' to water ; 263' to shale

(If additional space is needed attach separate page)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? NA IS ACO-1 FILED? NA

If not explain why? _____

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:
Panhandle Eastern Pipe Line Company

PHONE# (316) 723- 2185
ADDRESS R.R. 1 Box 148 City/State Greensburg, Kansas 67054 1995

PLUGGING CONTRACTOR Panhandle Eastern Pipe Line Company KCC LICENSE # NA

ADDRESS Same as above (company name) (contractor's)
PHONE # ()

PROPOSED DATE AND HOUR OF PLUGGING (If Known?) 8/23/95 2PM

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT

DATE: 8/29/95 AUTHORIZED OPERATOR/AGENT: [Signature]
(signature)

RECEIVED
STATE CORPORATION COMMISSION
AUG 29 1995
8-3095

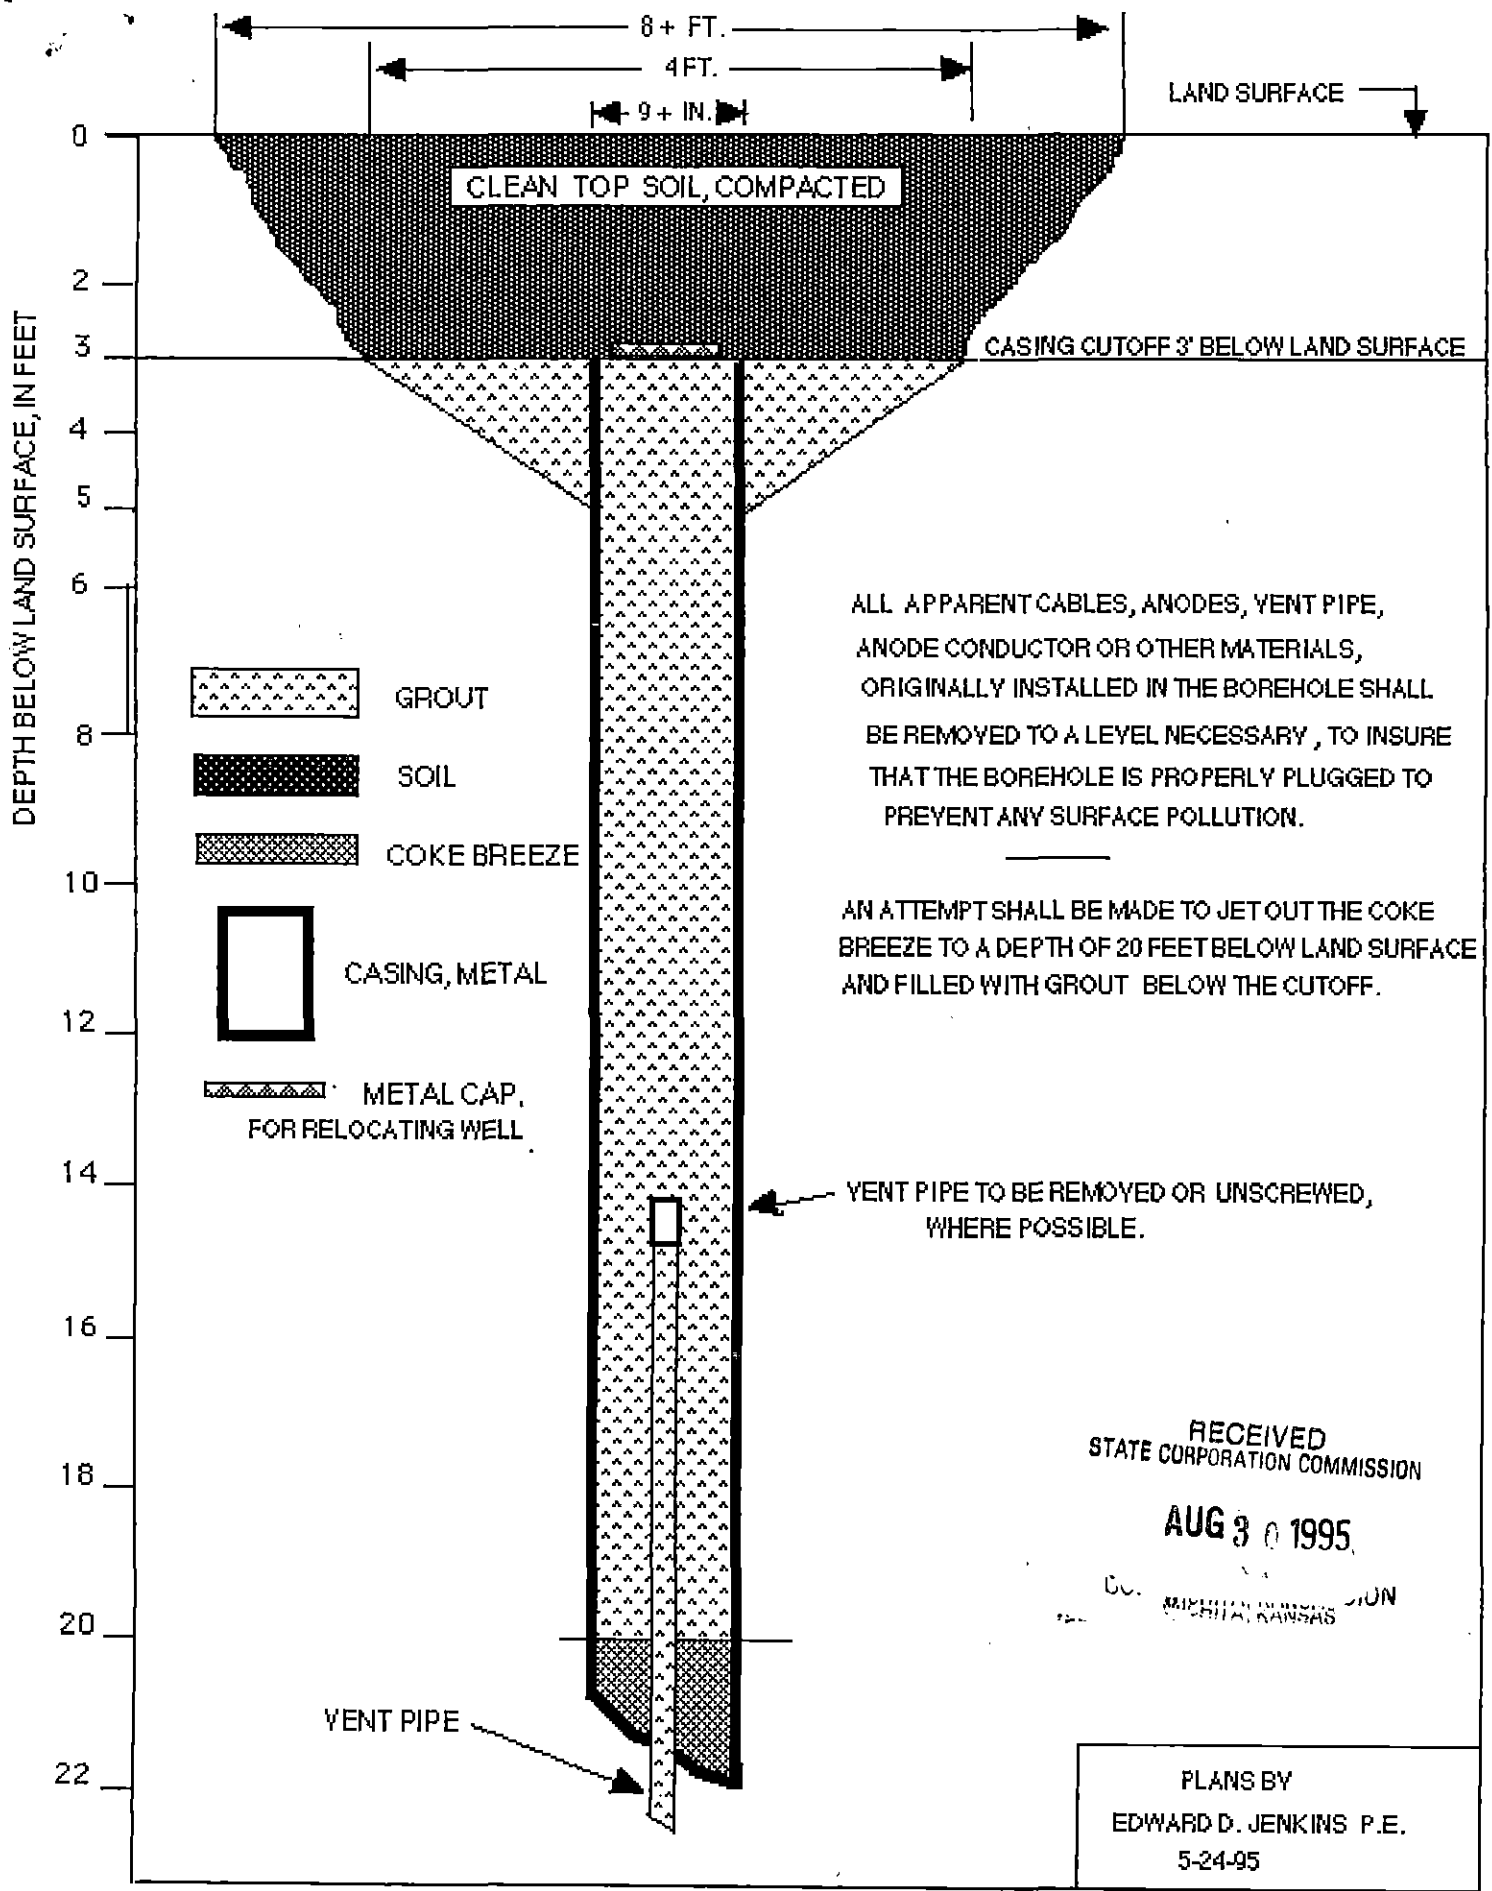


FIGURE 3.- PLANS FOR PLUGGING A CATHODIC WELL.

RECEIVED
STATE CORPORATION COMMISSION
AUG 30 1995
D.C. MICHAEL KANSAS DIVISION

PLANS BY
EDWARD D. JENKINS P.E.
5-24-95

Panhandle Eastern Pipeline Company

A Unit of Panhandle Eastern Corporation

August 29, 1995

State of Kansas

Kansas Corporation Commission Conservation District

Attn: Steve Durrant

130 South Market - Room 2078

Wichita, KS 67202

Dear Steve:

This letter is to inform you of the procedure we followed to plug deep wells that had casings. We dug around the wells three to four feet deep and cut the casing four inches above the dug out area. Then we removed the casing, blew coke breeze out of the casing six feet down and capped with 1 1/2 yards of concrete. A steel plate was placed on top of the concrete and backfilled.

On deep wells that did not have casings, the following procedure was used. We dug down around the cables, cut cables off at ground level and blew out as much coke breeze we could and capped with 1 1/2 yards of concrete. A steel plate was placed on top of the concrete and backfilled.

If you have any questions or need additional information, please contact me at 316/723-2185.

Sincerely,

Paul Voth
am

Paul Voth

Measurement/Corrosion Technician

PRV/alm

RECEIVED
STATE CORPORATION COMMISSION

AUG 30 1995

CONSERVATION DIVISION
WICHITA KANSAS