


15-097-20464-6000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Kiowa County, Sec. 1 Twp. 28 S Rge. 19 E/W
Location as "NE/CNW/SW" or footage from lines
C SE NW
Lease Owner TGT Petroleum, Inc.
Lease Name Pyle "B" Well No. 1
Office Address 209 E. William, Suite 615, Wichita, Ks. 67202
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole
Date Well completed June 8 1978
Application for plugging filed (verbally) June 8 1978
Application for plugging approved (verbally) June 8 1978
Plugging commenced June 8 1978
Plugging completed June 8 1978
Reason for abandonment of well or producing formation
No commercial quantity of oil or gas encountered
If a producing well is abandoned, date of last production 19

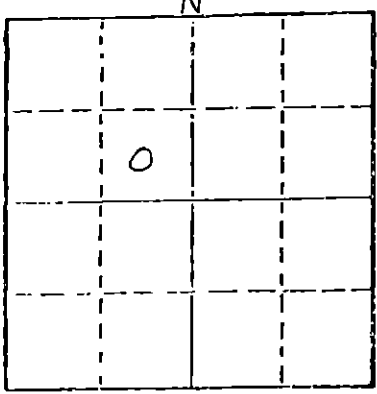

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Bill Owens
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4935'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

RECEIVED
STATE CORPORATION COMMISSION

Set 1st plug at 480' with 50 sacks
2nd plug at 40' with 12 sacks cement & 1/2 sack hulls
3rd plug in rathole with 3 sacks
Cemented with Halliburton Cement

JUN 13 1978

6-13-78

CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Jack L. Partridge, Ass't. Sec.-Treas. (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge
801 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of June, 1978



My commission expires July 21, 1979

Sandra Richman
Sandra Richman Notary Public.

OPERATOR: TGT Petroleum, Inc.
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: Pyle "B" #1
 LOCATION: C SE NW Section 1-28S-19W
 Kiowa County, Kansas
 SPUD DATE: May 27, 1978
 COMPLETION DATE: June 8, 1978.

0	458	Sand, red beds & shells
458	1160	Shale
1160	2464	Shale & lime
2464	2756	Shale & lime
2756	3430	Lime & shale
3430	3592	Shale & lime
3592	3850	Lime & shale
3850	4239	Shale & lime
4239	4756	Lime & shale
4756	4796	Lime
4796	4820	Lime & chert
4820	4843	Lime & shale
4843	4845	Lime, shale & chert
4845	4894	Shale & lime
4894	4935	Lime
	4935	Rotary Total Depth

RECEIVED
 STATE CORPORATION COMMISSION
 JUN 13 1978
 CONSERVATION DIVISION
 Wichita, Kansas

Spud hole at 9:00 a.m., May 27, 1978. Drilled 480' of 12 1/4" hole. Ran 12 joints of 8-5/8" - 24# surface casing. Set at 480' with 175 sacks of Halliburton light, 3%CaCl, followed by 150 sacks of Halliburton Class A Common, 3% CaCl. Job complete at 6:30 p.m., May 27, 1978. Cement did circulate.

T.D. 4935'. Set first plug at 480' with 50 sacks, second plug at 40' with 12 sacks cement and 1/2 sack hulls, third plug in rathole with 3 sacks. Cemented with Halliburton Cement. Plug was down at 2:00 p.m., June 8, 1978. State Plugger, Bill Owens.

STATE OF KANSAS)
) ss
 COUNTY OF SEDGWICK)


Jack L. Partridge, Assistant Secretary-Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the Pyle "B" #1, C SE NW Section 1-28S-19W, Kiowa County, Kansas.

ABERCROMBIE DRILLING, INC.

BY Jack L. Partridge
 Jack L. Partridge,
 Assistant Secretary-Treasurer

Subscribed and sworn to before me, a Notary Public, in and for the county and state aforesaid, as of this 12th day of June, 1978.

Sandra Richman
 Sandra Richman, Notary Public



My commission expires July 21, 1979.