


15-097-00046-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

KIOWA County. Sec. 28 Twp. 28 Rge. 19 (E)      (W)  
Location as "NE/CNW/SW" or footage from lines NW NW SW  
Lease Owner E. H. Adair Oil Company  
Lease Name LEMON Well No. 1  
Office Address 1017 East Second Street  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 1-26 19 56  
Application for plugging filed 1-30 19 56  
Application for plugging approved 1-30 19 56  
Plugging commenced 1-30 19 56  
Plugging completed 1-30 19 56  
Reason for abandonment of well or producing formation Dry Hole

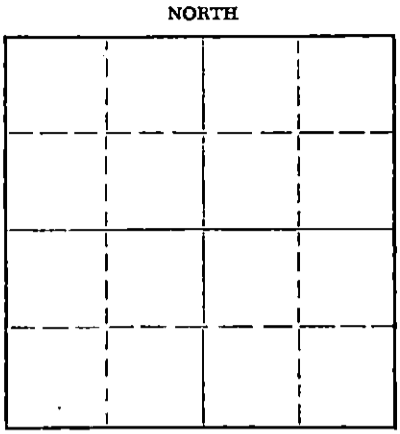

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production No. 19       
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes.

Name of Conservation Agent who supervised plugging of this well M.A. Rives, Box 8, Pratt, Kansas.  
Producing formation      Depth to top      Bottom      Total Depth of Well 4973 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
(Copy of Driller's Log attached hereto).						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from      feet to      feet for each plug set.

Bottom plug at 280 feet with 20 sacks cement on plug.  
Top plug at 35 feet with 10 sacks cement on plug.  
Filled to surface.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor E. H. Adair Oil Co.  
Address 1017 East Second Street.

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
K. W. JOHNSON (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *K.W. Johnson*  
K.W. Johnson  
(Address)

SUBSCRIBED AND SWORN TO before me this 1st day of February, 19 56

My commission expires 9/15/57.

*L. Hill*  
L. Hill Notary Public.

**PLUGGING**  
FILE SEC-28 T-28 R-19 W  
BOOK PAGE 34 LINE 42

FEB 7 1956  
2-7-56  
Wichita, Kansas

E. H. Adair Oil Company  
Wichita 7, Kansas.

15-097-00040-0000

E. H. Adair Oil Company  
Lemon No. 1  
NW NE SW of  
Sec. 28-Twp.28-19W.  
Kiowa County, Kansas.  
  
Elev. 2318 K.B.

Comm. 12-20-55  
Comp. 1-26-56  
Contractor:  
Adair - Rig No. 1.  
8-5/8 @ 291 ft. w/ 280 sx.  
  
D. & A.


Figures indicate bottoms of Formations

Shale	to	115	Lime & shale	to	3131
Sand		150	Lime		3605
Shale		675	Lime		4161
Lime		700	Shale, black		4166
Shale		880	Lime		4196
Shale & shells		2375	Shale		4330
Lime		2457	Lime		4333
Lime & shale		2600	Shale		4341
Lime		2710	Lime		4610
Lime & shale		2872	Shale, black		4614
Lime		2927	Lime		4657
Lime & shale		3000	Shale, black		4661
Lime		3096	Lime, shaley		4947
			Chert & cherty lime		4970

Geological Tops

HEEBNER	4161 (-1843)
DOUGLAS	4196 (-1878)
BROWN LIME	4331 (-2013)
LANSING K.C.	4344 (-2026)
MARMATON	4760 (-2442)
MISSISSIPPI	4950 (-2632)
Total Depth	4973

Certified correct:

  
K. W. Johnson - Geologist.

