

5-097-20075-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Kiowa County, Sec. 12 Twp. 28 Rge. (E) 19 (W)
Location as "NE/CNW&SW" or footage from lines C NE NE

Lease Owner TGT Petroleum Corporation
Lease Name Pyle-Taylor Well No. B-1
Office Address Suite 350, Sutton Place, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced May 4 19 73
Plugging completed May 12 19 73
Reason for abandonment of well or producing formation depleted

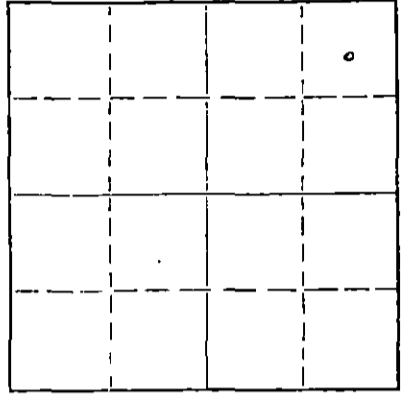

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4850 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	559'	8 5/8"	559'	none
			4849'	5 1/2"	4849'	3222.50

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded back to 4750' and dumped 5 sacks of cement.
Set 15' rock bridge at 225'. Plugged well with 3 yards of ready mix cement.

RECEIVED
STATE CORPORATION COMMISSION
MAY 25 1973
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor PIPE PULLERS, INC.
Address Box 486, Ellinwood, Kansas 67526

STATE OF KANSAS, COUNTY OF BARTON, ss.
Evelyn Roth (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth
Ellinwood, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 15th day of May, 1973

My commission expires Feb. 10, 1975
Serge A. Meyer Notary Public.

15-097-20075-0000

R O T A R Y D R I L L E R S ' L O G

OPERATOR: Rosen Oil Company
260 Sutton Place
Wichita, Kansas

DRILLING COMMENCED: June 1, 1969

CONTRACTOR: Graves Drilling Co., Inc.
505 Union Center
Wichita, Kansas

DRILLING COMPLETED: June 13, 1969

CASING RECORD: 8 5/8" surface casing, set at 559', with 400 sacks of cement; 4849' of 5 1/2" production pipe, set with 125 sacks of cement.

LOCATION: Pyle-Taylor "B" #1
C NE/4 NE/4 Sec. 12,
28S, 19W, Kiowa
County, Kansas

0	-	16	Soil
16	-	137	Sand
137	-	525	Shale & red bed
525	-	553	Lime
553	-	1135	Shale
1135	-	1165	Anhydrite
1165	-	1985	Shale & shells
1985	-	2380	Lime & shale
2380	-	2936	Shale & shells
2936	-	3315	Lime
3315	-	3455	Shale
3455	-	3827	Lime
3827	-	3846	Shale
3846	-	4155	Lime
4155	-	4266	Shale
4266	-	4534	Lime
4534	-	4605	Shale & shells
4605	-	4732	Lime
4732	-	4764	Shale
4764	-	4812	Chert & lime
4812	-	4842	Shale
4842	-	4850	Shale
4850	-		Total Depth


RECEIVED
STATE CORPORATION COMMISSION
FEB 20 1973
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify the foregoing statements to be true and correct, to the best of my knowledge.

GRAVES DRILLING COMPANY, INC.

By John C. Graves
John C. Graves

STATE OF KANSAS)
Sedgewick County)ss



Subscribed and sworn to before me, a Notary Public, this 17th day of June, 1969.
My Commission Expires: July 28, 1970

Mary Ann Scott
Mary Ann Scott, Notary Public

RECEIVED JUN 18 1969