


15.151-20334-60-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

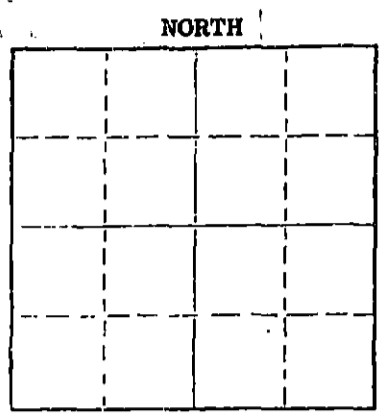

Pratt County, Sec. 3 Twp. 29S Rge. (E) 13 (W)
 Location as "NE/CNW/SE" or footage from lines C NE SE
 Lease Owner Sohio Petroleum Company
 Lease Name Sobba Well No. 1
 Office Address P. O. Box 673, Russell, Kansas 67665
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
 Date well completed P&A 5-29 19 76
 Application for plugging filed Verbal 5-28-76 Written 6/21 19 76
 Application for plugging approved Verbal 5-28-76 Written 6/21 19 76
 Plugging commenced May 29 19 76
 Plugging completed May 29 19 76
 Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production -- 19 --
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4732 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	304'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

8-5/8" 24# surface casing set at 304' w/350 sx Class A w/2% salt & 3% CaCl left in hole.

Ran 8 stds DP, spotted 35 sx cement at 250', pushed bridge to 40', spotted 15 sx cement to surface, 5 sx in rat hole.

RECEIVED
STATE CORPORATION COMMISSION
06-22-76
JUL 22 1976

(If additional description is necessary, use BACK of this sheet)
 Name of Plugging Contractor Gabbert-Jones, Inc. CONSERVATION DIVISION
 Address 830 Sutton Place, Wichita, Kansas 67202 Wichita, Kansas

STATE OF KANSAS COUNTY OF RUSSELL, ss.
W. H. Ward (employee of owner) or ~~(xxxxxx)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. H. Ward
P. O. Box 673, Russell, Kansas 67665
 (Address)

SUBSCRIBED AND SWORN TO before me this 20th day of June, 19 76



My commission expires Aug 27, 1979
Joyce Gillett
 Joyce Gillett Notary Public.

GABBERT-JONES, INC.
 WICHITA, KANSAS
 DRILLERS' WELL LOG

Sobba #1
 NE SE Sec 3-29S-13W
 Pratt County Kansas

Commenced: 5-14-76

Completed: 5-29-76

OPERATOR: SOHIO PETROLEUM COMPANY

Depth From	to	Formation	Remarks
0	130	Clay-Sand	Ran 7 jts of 24# 8 5/8" csg
130	315	Shale	set @ 304' Cemented w/
315	1060	Shale-Redbed	300 sks Common 3% CC
1060	1135	Shale	2% Salt PD @ 2:45 a.m. 5-15-76
1135	2120	Shale-Shells	1" to 40' Cemented w/50 sks
2120	2255	Shale-Lime	Common 3% CC
2255	2825	Lime-Shale	Job Complete @ 8:15 a.m. 5-15-76
2825	4124	Shale-Lime	
4124	4417	Lime	
4417	4426½	Core #1	
4426½	4621	Lime	
4621	4634	Core #2	
4634	4732	Lime	
	4732 - TD		DRY & ABANDONED

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

I, the undersigned, being duly sworn on oath, state that the above Drillers Log is true and correct to the best of my knowledge and belief and according to the records of this office.


GABBERT-JONES, INC.

James S. Sutton II
 JAMES S. SUTTON II

Suscribed and sworn to before me this 16th day of June, 1976.

Elizabeth J. Edwards
 ELIZABETH J. EDWARDS

My Commission expires February 6, 1979.



RECEIVED
 STATE CORPORATION COMMISSION

JUN 22 1976

CONSERVATION DIVISION
 Wichita, Kansas