
Form CP-3 Rev. 6-26-62 '

J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

INV. NO. 1426-W

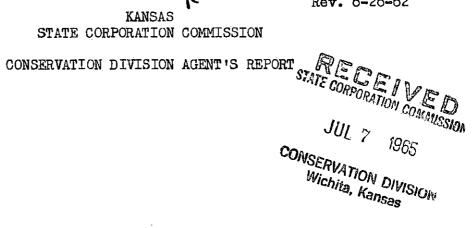

Operator's Full Name D. R. Lauck Oil Company, Inc. & Sun Oil Company	
Complete Address: 301 S. Broadway, Wichita, Kansas	
Lease Name Sherer Well No. # 1	
Location	W
County Kiowa Total Depth 4950'	
Abandoned Oil Well Gas Well Input Well SWD Well D & A X	
Other well as hereafter indicated:	
Plugging Contractor: Lauck Drilling Company, Inc.	
Address: 301 S. Broadway, Wichita, Kansas License No.	
Operation Completed: Hourl1:45AM Day 6th Month July Year 1965	
The Above well was plugged as follows:	
318' of 8 5/8" surface pipe, cement circulated with 265 sacks. Fluid	<u>1</u>
level in the hole was at 200. lst cementing plug and 1 sack of hull	Ls
was pushed in fluid to 275', and cemented with 25 sacks, through the	<u>) </u>
drill pipe. Hole was filled with drilling mud to 40, 2nd cementing	
plug, bridged solid with dry cement and hulls on fluid at 40', and	_
cemented with 10 sacks to the base of the cellar. Rat hole bridged	
and cemented with 2 sacks.	
I hereby certify that the above well was plugged as herein stated.	
NVOICED Signed: Orchie Elvin	9
DATE 7/7/65 Well Plugging Supervise	T