


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH



Locate well correctly on above  
Section Plat

Kingman County. Sec. 32 Twp. 27S Rge. (E) 8 (W)  
Location as "NE/CNWxSWx" or footage from lines C. NE NW.  
Lease Owner Pickrell Drilling Company  
Lease Name Probst "B" Well No. 1  
Office Address 705 4th Natl Bank Bldg, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed January 9, 19 65  
Application for plugging filed January 9, 19 65  
Application for plugging approved January 9, 19 65  
Plugging commenced January 9, 19 65  
Plugging completed January 9, 19 65  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie Elving  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4400 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	210'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Heavy mud to 200', set plug. Cemented with  
25 sacks cement. Heavy mud to 40', set plug,  
cemented with 10 sacks cement to bottom of  
cellar. Plugged rat hole with 2 sacks cement.

RECEIVED  
STATE CORPORATION COMMISSION

JAN 14 1966

1-14-66

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pickrell Drilling Company  
Address 705 4th National Bank Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

C. W. SEBITS

(owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature)

C. W. Sebits  
705 4th National Bank Bldg, Wichita, Kansas  
(Address)

Subscribed and sworn to before me this 13th day of January, 1966

My commission expires June 21, 1966

Maxine Blackman  
Maxine Blackman, Notary Public.

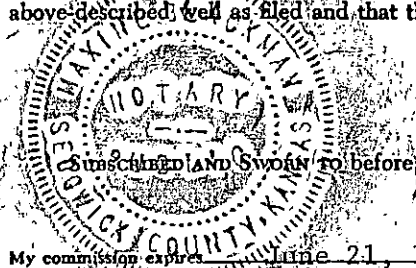

**ROTARY DRILLING LOG**

COMPANY: PICKRELL DRILLING COMPANY  
705 4th National Bank Building  
Wichita, Kansas

Rotary Drilling Commenced 12-27-65  
Rotary Drilling Completed 1--8-66

LOCATION: Probst "B" No. 1, C NE NW Section 32-27-8W, Kingman County, Kansas.

CONTRACTOR: PICKRELL DRILLING COMPANY  
Wichita, Kansas

CASING RECORD: (10 jts) 8 5/8" surface casing set at 210', cemented with 160 sacks cement. Circulated. Completed 6:45 P.M. December 27, 1965. No oil string run. D & A.

**LOG**

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

80	Sand	<u>C. F. S.</u>
210	Red Rock	3700
690	Red Bed & Shale	3750
1200	Shale	3796
1760	Lime & Shale	4037
1850	Lime	4285
3085	Lime & Shale	4320
3292	Sandy Lime & Shale	4339
3580	Lime & Shale	4352
3615	Lime	4361
3715	Lime & Shale	4367
3795	Lime	4400
3810	Lime & Shale	
3880	Lime	<u>Slope Tests</u>
4037	Lime & Shale	2500
4055	Mississippian	3000
4080	Cherty Lime	3500
4128	Lime & Chert	4000
4167	Mississippian	
4220	Kinderhook	<u>S. L. M.</u>
4267	Shale & Lime	3656
4310	Kinderhook	3980
4362	Shale	4281
4392	Viola Lime & Chert	
4400	Viola - RTD	

**RECEIVED**  
STATE CORPORATION COMMISSION

JAN 14 1966

CONSERVATION DIVISION  
Wichita, Kansas

The undersigned, C. W. SEBITS, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY  
By *C. W. Sebitts*  
C. W. Sebitts, Attorney-in-Fact

STATE OF KANSAS }  
COUNTY OF SEDGWICK } ss.:

On this 13th day of January, 1966, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. SEBITS, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires: June 21, 1966

*Maxine Blackman*  
Maxine Blackman, Notary Public