


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Kiowa County, Sec. 35 Twp. 27 Rge. 16 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines _____

C of SE SW
Lease Owner Imperial Oil Co.
Lease Name Ward #1-35 Well No. _____
Office Address Great Bend, Kansas 67530
Character of Well (Completed as Oil, Gas or Dry Hole) _____

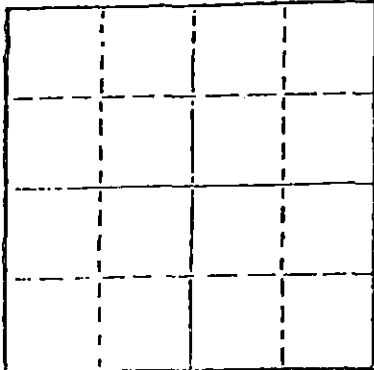

Locate well correctly on above
Section Plot

Date Well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 8/1/78 _____ 19____
Plugging completed 8/4/78 _____ 19____
Reason for abandonment of well or producing formation
depleted.

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Owens
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4697
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	406	none
				4 1/2"	4696	3616'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Ran 4 sacks cement. Loaded 4 1/2" casing with salt water. Shot pipe at 3616', pulled 83 joints. Squeezed hole with 3 sacks hulls, 25 sacks gel, released plug and displaced with 125 sacks 50/50 pozmix, 2% gel and 3% cc.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION

AUG 11 1978

CONSERVATION DIVISION

(If additional description is necessary, use BACK of this record)
Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS

8-11-78

STATE OF KANSAS COUNTY OF RICE, ss.
R. DARRELL KEISO (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Keiso
CHASE, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 10th day of August, 1978

Margaret Melcher
Notary Public.

My commission expires _____

