



JOHN ANDERSON, Jr. Governor
 RICHARD C. BYRD Chairman
 ALVIN F. GRAUERHOLZ Commissioner
 HARRY G. WILES Commissioner
 RAYMOND B. HARVEY Secretary
 CHARLES C. McCARTER Gen. Counsel

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
 500 Insurance Bldg. 212 N. Market
 WICHITA, KANSAS

VERBAL PERMIT FORM
 (To Be Filed By Plugging Agent)

15-187-00078-0000

RECEIVED
STATE CORPORATION COMMISSION

DEC - 8 1965

CONSERVATION DIVISION

J. P. Roberts
 Assistant Director
 500 Insurance Building
 212 North Market
 Wichita 2, Kansas

Dear Sir:

Mr. Locke of Kansas Natural Gas Inc. has this date requested permission to plug the following described well:

Mr. Locke guarantees payment of the plugging fee.

Operator's full Name: Kansas Natural Gas Inc.

Complete Address: Box 537 Garden City, Kansas

Lease Name: Speck Well No. # 11

Location: NW SE Sec. 32 Twp. 28 Rge. 40 (E)(W)

County Stanton Total Depth 2499' Oil Well

Gas Well S Input Well SWD Well D & A X Lost Hole

Mr. Locke was instructed to plug the well as follows:

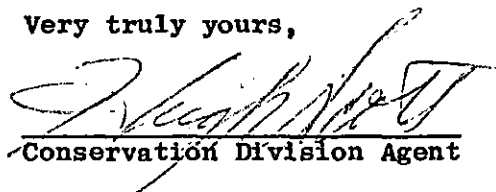
10 3/4"-482' Circulated w/cement. 7"-2499' Cemented. Top perforations-2244'

Plug bottom w/20 "ax.cement top cement 2000'. Mud 2000' to 700'

Spotted 50 Sax.cement 700' to 550'. Mud 550' to 150'.

Plug, 30 Sax.cement 150' to 0

Very truly yours,


 Conservation Division Agent