


DISTRICT CONSERVATION AGENT'S REPORT

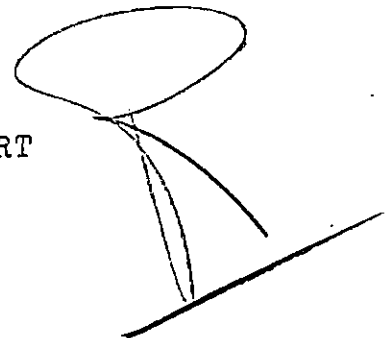

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

15-081-00120-0000

FILE NO. NE 7 E SW

LOCATION 2310' from South & 2310' from West.

SEC. 4 TWP. 28 RGE. 32 West.

Dry Hole  Abandoned Oil Well \_\_\_\_\_ Abandoned Gas Well

I have today completed supervision of plugging of:

Well No. 1 Lease Elliott

Operator Champlin Refining Co. Address P.O. Box 552, Enid Oklahoma.

Field Hugoton County Haskell

Total Depth 2830 Feet.

(Describe briefly the manner in which the well was plugged)

Dumped 25 sacks cement with dump bailer. Top of cement 2786' Dumped 12 sacks Cal-Seal with dump bailer to 2708'. Dumped 3 sacks of cement to 2693'. Halliburton pumped 7" casing full of heavy mud. Displaced 30' of mud at top with cement.

Cut off 10 3/4 and 7" casing 6 feet below ground level and capped with boiler plate. Both strings of casing were cemented ~~with cement~~ to top when run.

RECEIVED  
STATE CORPORATION COMMISSION

NOV 7 - 1950

CONSERVATION DIVISION  
Wichita, Kansas

11-7-50

*R. J. Phillips*  
District Conservation Agent

Date November, 3, 1950

PLUGGING  
FILE SEC. 4 T 28 R 3 W  
BOOK PAGE 26 LINE 1