


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

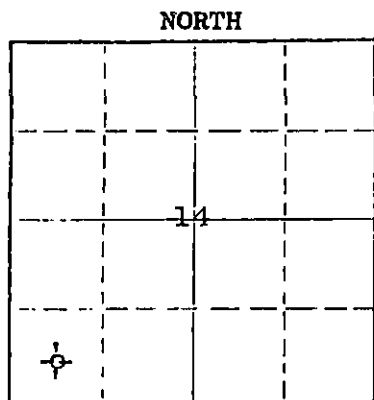

Locate well correctly on above Section Plot

Pratt County, Sec. Twp. Rge. (E) (W)
Location as "NE/CNWSW" or footage from lines C SW SW
Lease Owner Gemini Oil Company
Lease Name Mason Well No. 1
Office Address 1408 Philtower Building, Tulsa, Oklahoma 74103
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed March 27, 1975
Application for plugging filed March 27, 1975
Application for plugging approved March 27, 1975
Plugging commenced March 27, 1975
Plugging completed March 27, 1975
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well 4711 feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10 3/4"	236.94	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

- 4711'-250' - Hole filled with mud & hulls.
- 250'-246' - Plug
- 246'-40' - Cement, 35 sacks.
- 40'-36' - Plug
- 36'-6' - Cement, 15 sacks. (bottom of cellar)
- 2 sacks cement in rat hole.

RECEIVED
STATE CORPORATION COMMISSION

APR 21 1975
4-21-75
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor
Address

STATE OF OKLAHOMA COUNTY OF TULSA ss.
Thomas E. Matson (operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Thomas E. Matson
1408 Philtower Bldg., Tulsa 74103
(Address)

SUBSCRIBED AND SWORN to before me this 17th day of April, 1975

My commission expires April 25, 1978
Deloris J. Brunson Notary Public.

Gemini Oil Company

Mason #1

C SW SW Sec. 14-29S-13W
Pratt County, Kansas

Contractor: Sterling Drilling Co.
Box 129
Sterling, Kansas 67579

Sub-Contractor: D. R. Lauck Oil Company, Inc.
301 S. Broadway
Wichita, Kansas 67202

Commenced: March 13, 1975
Completed: March 27, 1975

Drillers Log

Shale	395
Shale & Shells	1030
Shale	1480
Shale & Shells	1935
Shale & Lime	2190
Lime & Shale	2610
Shale & Lime	3185
Lime & Shale	3380
Shale & Lime	3626
Lime & Shale	3780
Lime	4711 RTD

RECEIVED
STATE CORPORATION COMMISSION

APR 21 1975
CONSERVATION DIVISION
Wichita, Kansas