

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Kiowa County, Sec. 7 Twp. 29 Rge. 17W (E) (W)

Location as "NE/CNWSW" or footage from lines: SE-SE-SE  
Midwestern Supply Co., Inc.

Lease Owner: Yohn Well No. 1

Lease Name: 207 Brown Building, Wichita, Kansas 67202

Office Address: Gas

Character of Well (completed as Oil, Gas or Dry Hole): Gas

Date well completed: 19 74

Application for plugging filed: November 24, 19 74

Application for plugging approved: 19 74


Plugging commenced: November 24, 19 74

Plugging completed: December 2, 19 74

Reason for abandonment of well or producing formation: Not productive

If a producing well is abandoned, date of last production: 19 74

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

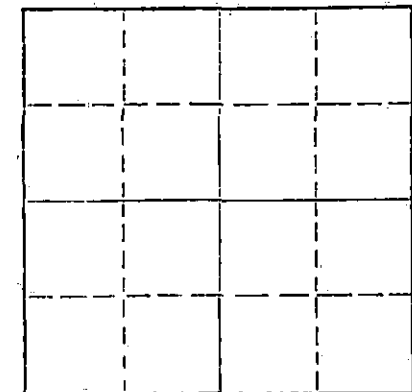

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well: Russell Biberstien

Producing formation: Miss. Depth to top: Bottom: Total Depth of Well: 4843 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	463	None
				4 1/2	4836	2646

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sand from 4843 to 4820  
4 sacks of cement from 4820 to 4780

Ripped at 3700 - 3600 - 3200 - 3000 - 2800 - 2646

Dial logg ran free point and Halliburton tried to circulate.

Built wooden bridge at 250. Rock from 250 to 240.

4 yards of ready mix to surface.

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 29 1974  
CONSERVATION DIVISION  
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor: Clarke Well Service

Address: Medicine Lodge, KANSAS

STATE OF KANSAS, COUNTY OF SEDGWICK, SS.


Robert M. Brentlinger (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Robert M. Brentlinger

(Address) 19 74

SUBSCRIBED AND SWORN to before me this 18th day of December, 19 74

My commission expires August 26, 1977  
Arlene L. Sloop Notary Public.



August 13, 1974

DRILLERS LOG

#1 Yohn  
SE SE-Sec. 7-29S-17W  
Kiowa County, Kansas

OPERATOR: B & B Drilling, Inc.  
CONTRACTOR: B & B Drilling, Inc.  
COMMENCED: July 29, 1974  
COMPLETED: August 10, 1974

8 5/8" @ 408' w/250 sx

0	416	Surface soil & Sand
416	460	Sand
460	466	Anhydrite
466	1074	Redbed & Sand
1074	1088	Anhydrite
1088	1790	Shale
1790	2640	Lime & Shale
2640	3038	Lime
3038	3900	Lime & Shale
3900	4836	Lime
4836		RTD

RECEIVED  
STATE CORPORATION COMMISSION  
NOV 27 1974  
CONSERVATION DIVISION  
Wichita, Kansas

4 1/2" @ 4818' w/145 sx

We certify that the above and foregoing is a true and correct copy of the log on the #1 Yohn located in Kiowa County, Kansas.

B & B DRILLING, INC.

*Bill Lahar*  
Bill Lahar

Subscribed and sworn to before me this 13th day of August, 1974.

*Betty M. Maloney*  
Betty M. Maloney Notary Public

My Commission Expires:

