


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

173

15-175-01465-0000

NORTH



Locate well correctly on above
Section Plat

Sedgwick

County. Sec. 1 Twp. 26S Rge. 1 (E) 1 (W)

Location as "NE/CNW/SW" or footage from lines CS/2 NE/4

Lease Owner Bennett & Gould

Lease Name Carl Schnitzler

Well No. 1

Office Address c/o Chas. E. Gould, 5828 N. Broadway, Wichita, Kans.

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed April 2, 1954 19

Application for plugging filed March 15, 1955 19

Application for plugging approved March 15, 1955 19

Plugging commenced March 17, 1955 19

Plugging completed March 23, 1955 19

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2652 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	200'	
				5-1/2"	2568'	2284' 8 4

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with sand to 2560 feet. Dumped 6 sacks
of cement at 2560 feet. Mudded hole and hole made
solid at 190 feet. Filled hole with mud to 25 feet.
Set bridge and 5 sacks of cement at top.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Morgan Well Plugging Service

Address Hutchinson, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.


(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God,

(Signature) Charles E. Gould
5828 No. Broadway, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of April, 1955

My commission expires January 31, 1957

Notary Public.

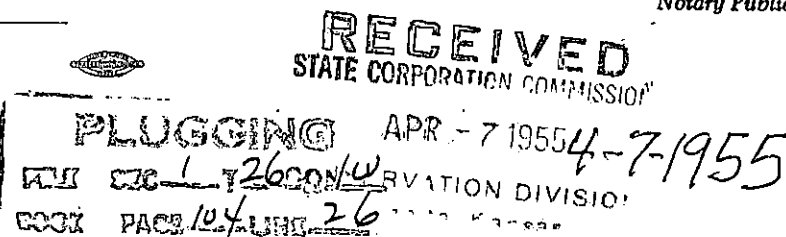

15-175-01465-0000

ROTARY DRILLER'S LOG

Schnitzler #1

Elevation: 1348 RB (Estimated)
1343 Ground (Estimated)Location: Center of $S\frac{1}{2}$ NE $\frac{1}{4}$ of
Sec. 1, Twp. 26S, Range 1E,
Sedgwick County, Kansas.Casing Record: 200'-8 5/8" pipe 175
2 sac cement and 4 sac CC
2568' 5 1/2" Casing- 25 sac regular bulk cementOperator: Charles E. Gould
5830 N. Broadway,
Wichita, Kansas.Contractor: Salina Drilling Corp., Inc.
Box #566,
Salina, Kansas.

Well Commenced: 3-27-54

Geologist: Willis D. Waterman
872 S. 9th,
Salina, Kansas.

Well Completed: 4-2-54

Rotary Table and cellar	8
Surface soil and clay	20
Sand	75
Sandy Shale	100
Shale and shells	180
Lime	760
Shale and shells	820
Lime and shale	870
Shale and shells	1680
Lime and shale	2540
K. C. Lime	2577

Formation Tops as picked by Geologist

Heebner-----2020
Tornoto-----2032
Brown Lime (Ipan)-----2255

Lansing-----2305
Kansas City-----2541
Total Depth-----2577
***** Cable Tool Total Depth 2652

The above rotary driller's log is complete and correct to the best of my knowledge.

STATE CORPORATION COMMISSION

APR -7 1955 SALINA DRILLING CORPORATION, INC.

CONSERVATION DIVISION

Wichita, Kansas

By

Lucas S. Hallam