

*OR*

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Sedgwick County, Sec. 2 Twp. 27 Rge. 1 (E) ~~N~~ (W)

Location as "NE/CNW/SW" or footage from lines C S/2 NE SW

Lease Owner Drillers Production Company, Inc.

Lease Name Southwestern College Well No. 3

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_

Date well completed \_\_\_\_\_ 19\_\_

Application for plugging filed \_\_\_\_\_ 19\_\_

Application for plugging approved \_\_\_\_\_ 19\_\_


Plugging commenced 9-13-65 \_\_\_\_\_ 19\_\_

Plugging completed 9-15-65 \_\_\_\_\_ 19\_\_

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

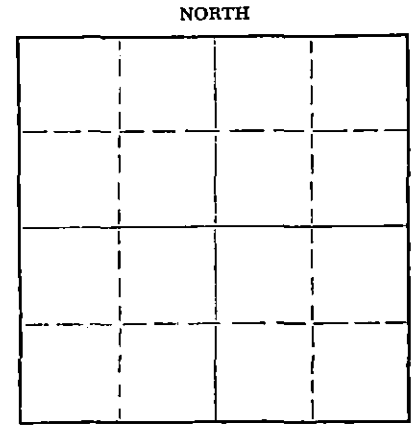

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Paul Turpin

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3156 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	202'	None
				5-1/2"	3394'	2772'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked hole to 3156', sanded hole to 3050' and dumped 5 sacks of cement @ 3050' with dump bailer. Pulled 5 1/2" casing, bailed hole to 225', set rock bridge to 210' and dumped 20 sacks of cement @ 210'. Mudded hole to 30', and ran 10 sacks of cement to base of cellar.

RECEIVED  
STATE CORPORATION COMMISSION

PLUGGING COMPLETE.

OCT 7 1965

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY  
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.  
Noel J. Knight (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight  
Chase, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 28th day of September, 1965

My commission expires May 20, 1968

Milton J. Volis  
Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

Wichita, Kansas

2-27-1W


9

Company - THE DRILLERS GAS CO.  
Farm - Southwestern College No. 3

SEC. 2 T. 27 R. 1W  
C S/2 NE SW

Total Depth. 3402½  
Comm. 10-2-49 Comp. 11-16-49  
Shot or Treated.  
Contractor. Springer & Harper  
Issued. 12-24-49

County. Sedgwick  
KANSAS



CASING:

8" set @ 202' w/150 sx.  
5" set @ 3394' w/125 sx.

Elevation. \_\_\_\_\_  
Production. Est. 30 Bbls.

Figures Indicate Bottom of Formations.

Sand	55
Shale	185
Lime	230
Anhydrite; shale	330
Anhydrite	345
Shale	350
Red rock	360
Lime - shale	970
Sandy lime	985
Shale - shells	1180
Sand	1325
Shale - shells	1400
Lime	1445
Shale - lime	1692
Lime	1750
Lime - shale	1925
Lime	2170
Lime-shale	2395
Shale	2592
Lime	2725
Shale - lime	2805
Shale	2840
Shale - lime	3076
Miss. lime	3115
Lime	3190
Lime - chert	3220
Lime	3292
Shale	3385
Viola	3390
Simpson	3402½

Total Depth

FORMATION TOPS:

Kansas City	2592
Mississippi	3076
Viola	3385
Simpson	3390

RECEIVED  
STATE CORPORATION COMMISSION

OCT 7 1965

CONSERVATION DIVISION  
Wichita, Kansas