

R

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit.
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Sedgwick County. Sec. 2 Twp. 27 Rge. 1W (E) (W)

Location as "NE/CNW%SW%" or footage from lines NW SW NE

Lease Owner Drillers Production Company

Lease Name Ott #3 Well No.

Office Address Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 1/13/71 19

Plugging completed 1/16/71 19

Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

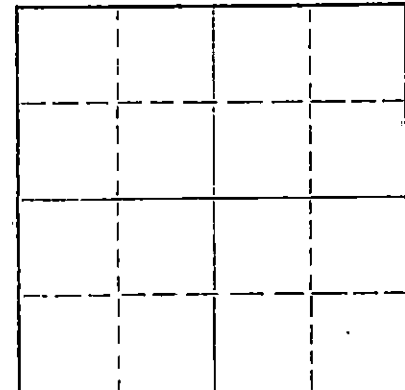

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Justice

Producing formation Depth to top Bottom Total Depth of Well 3409' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	214	none
				5 1/2"	3403	2064'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole, found bridge at 150', drove bridge on bottom.
Sanded hole to 2690', ran 5 sacks of cement. Shot pipe at 2335', 2236', 2171', pulled 64 joints. Bailed hole to 240', set 15' rock bridge and ran 20 sacks of cement. Mudded hole to 40', 10' rock bridge and ran 10 sacks of cement.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
JAN 28 1971
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss. NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of January, 19 71



Margaret Anclaker
Notary Public.

My commission expires

2/15/71

KANSAS WELL LOG BUREAU --- KANSAS GEOLOGICAL SOCIETY

50 EAST MURDOCK - WICHITA, KANSAS

9

COMPANY DRILLERS GAS COMPANY

SEC. 2 T. 27 R. 1W

FARM Ott

NO. 3

LOC. NW SW NE

TOTAL DEPTH 3409 PB 2740

COUNTY Sedgwick

COMM. 10-9-50

COMP. 11-10-50

KANSAS

BHDT OR TREATED

CONTRACTOR Springer & Harper

ISSUED 12-30-50



CASING

8 5/8" 211' cem w/225 sx.

5 1/2" 3403' cem w/125 sx.

ELEVATION 1328 RB

PRODUCTION Temp. Abd.

FIGURES INDICATE BOTTOM OF FORMATIONS

shale, shells	175
lime	214
anhydrite	385
anhydrite, shale	415
shale, shells	625
lime	790
lime, shale	1535
lime	1570
lime, shale	1875
lime	1990
lime, shale	2110
lime	2125
lime sandy	2250
shale	2265
lime	2385
lime, shale	2495
shale	2582
lime, K.C.	2601
lime	2830
lime, shells, shale	2920
lime, shale	3070
chat	3077
lime	3110
cherty lime	3285
shale	3400
sand	3403 1/2
sand HFW	3409
Total depth	
Plugged back to	2740

Tops:

Lansing	2300
Kansas city	2582
Mississippian	3070
Kinderhook	3288
Simpson	3398

Perf; 2694-2700 water & SSO

RECEIVED
STATE CORPORATION COMMISSION
DEC 14 1970
CONSERVATION DIVISION
Wichita, Kansas