

9

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

WELL PLUGGING RECORD

Give All Information Completely.
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

Sedgwick County. Sec. 2 Twp. 27 Rge. 1 (E) (W)

Location as "NE/CNWxSWx" or footage from lines SW SW NE
Lease Owner Drillers Production Company
Lease Name Ott #6 Well No.
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 2/19/71 19
Plugging completed 3/3/71 19
Reason for abandonment of well or producing formation depleted.

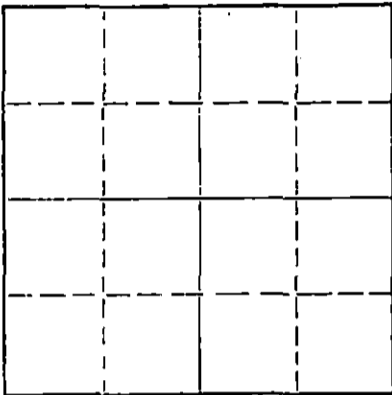

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Justice
Producing formation Depth to top Bottom Total Depth of Well 2702 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	RECEIVED			10-3/4	215	none
	STATE CORPORATION COMMISSION			7"	2692'	2105'
	MAR 17 1971					
	CONSERVATION DIVISION					
	Wichita, Kansas					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 2702', ran sand to 2685' and dumped 6 sacks of cement.
Shot pipe at 2190' and 2100', pipe came loose, pulled 68 joints.
Bailed hole to 220', set rock bridge and dumped 40 sacks of cement.
Mudded to 40', rock bridge and dumped 15 sacks of cement.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PILLING CO., INC.
Address CHASE, KANSAS


STATE OF KANSAS COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN to before me this 11th day of March, 1971

My commission expires 2/15/75

Margaret Melcher
Notary Public.



SPRINGER & HARPER

DRILLING CONTRACTORS
VALLEY CENTER, KANSAS

March 12, 1956

The Drillers Production Company, Inc.,
Insurance Building
212 North Market Street
Wichita 2, Kansas

K. W. Ott No. 6

SW/4 of the SW/4 of the
NE/4 of Section 2, Township
27, Range 1-West, Sedgwick
County, Kansas

sand	0	60
sand & clay		80
sand, shale & shells		208
anhydrite		215
lime		520
shale		570
lime & shale		710
sand & lime		720
lime & shale		831
shale		862
lime & shale		930
shale		965
lime & shale		1375
lime		1410
lime & shale		1510
shale		1530
lime		1610
shale & lime		1670
lime		1710
lime & shale		1860
lime		1910
lime & shale		2020
lime		2035
lime & shale		2320
lime		2360
lime & shale		2590
lime	T.B.	2692

Casing

Ran 218' of 10 3/4"
surface casing, cemented
W/200 sacks of cement.

Ran, set & cemented 75 jts.,
7" - 24# casing, 15 jts.,
7" OD 20# 8 RD THD casing
@ 2692' W/50 sacks of
cement.

RECEIVED
STATE CORPORATION COMMISSION
FEB 10 1971
CONSERVATION DIVISION
Wichita, Kansas

Top K.C. 2582'

SPRINGER & HARPER

By L. L. Harper
L. L. Harper