

15-173-01735-0600

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR

~~FORMATION PLUGGING RECORD~~

Strike out upper line
when reporting plug-
ging off formations.

NORTH

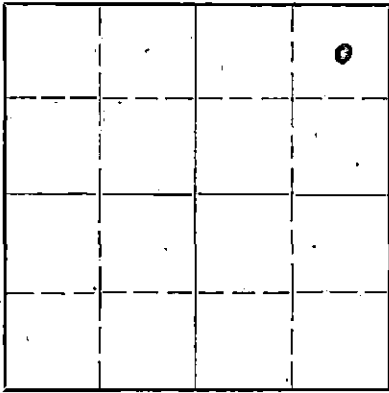

Locate well correctly on above
Section Plat

Sedgwick County, Sec. 1 Twp. 26 Rge. 1 (E) x (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines N/2 E/2 NE/4
Lease Owner Central Supply Company
Lease Name Alfred E. Difford Well No. 3
Office Address 109 No. Elgin Street Tulsa, Oklahoma (3)
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed February 19 34
Application for plugging filed July 27, 1944 19
Application for plugging approved 2 507 August 3, 1944 19
Plugging commenced August 5, 1944 19
Plugging completed 8-29-44 August 15, 1944 19
Reason for abandonment of well or producing formation Not commercially profitable
due to increased salt water and decreased oil production
If a producing well is abandoned; date of last production July 1944 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well
Producing formation Lime Depth to top 3381 Bottom 3392 Total Depth of Well 3395 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

| Formation | Content | From | To | Size | Put In | Pulled Out |
|-----------|---------|------|------|--------|--------|------------|
| Salte | Water | 1105 | 1125 | | | |
| Lime | Water | 3090 | 3286 | 8-5/8" | 3300' | 3,013' |
| Lime | Oil | 3381 | 3392 | 7"OD | 3381' | 3,368' |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Six sacks of cement dumped with dump-bailer at 3,384' and 7"OD was pulled.
The hole was then mudded to the bottom of the 8-5/8" which was at 3,300'. 8-5/8" was shot off at 3,000'.
One thousand feet of 8-5/8" was pulled and the hole was mudded.
Balance of 2,000 feet of 8-5/8" was pulled and the hole was filled with mud to 90 feet. Twenty sacks of cement were dumped, then hole was filled and five sacks of cement put in from top of the mud to the surface.



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Central Supply Company
Address 109 North Elgin Street Tulsa 3, Oklahoma

STATE OF Oklahoma COUNTY OF Tulsa, ss.
I, Abe Mizel, Partner (employee of owner, partner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Abe Mizel
Tulsa, Oklahoma (Address)

SUBSCRIBED AND SWORN to before me this August 19 44
Notary Public

My commission expires March 9, 1947

