


R

6-6-1944

DISTRICT CONSERVATION AGENT'S REPORT

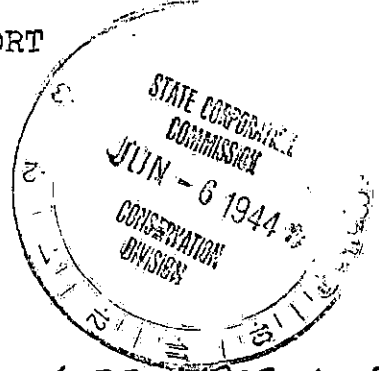

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 15-173-5172-0000
LOCATION SE 1/4 NE 1/4 NE 1/4
SEC. 1 TWP. 26 RGE. 1 W

Dry Hole Abandoned Oil Well ✓ Abandoned Gas Well

I have today completed supervision of plugging of:

Well No. 4 Lease Wilson
Operator Dolan Oil Address 1117 Union Nat Bank Bldg, Wichita
Field Valley Center County Redgumier
Total Depth 3406 Feet.

(Describe briefly the manner in which the well was plugged)

5 3/16" liner set from 3314 to 3379
Bridges on top of liner & 15 sq cement run on
top of bridge.
8 5/8" pipe ripped & shot at 2925' and pulled up
to top of KC line. Hole filled with mud above
KC and to 1300'. Three bridges at 68' and cemented
with 15 sq. 63' 20" casing left as surface pipe.
Mudset to 3' of top of 26" and cement cap of
5 sq on top of 20"

D. J. Piller
District Conservation Agent

Date May 5, 1944

PLUGGING
FILE L 26.1 W
BOOK 113 PAGE 2 LINE 2