

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Pratt

County, Sec. 33 Twp. 29 Rge. 13 (E) 13 (W)

Location as "NE/CNW/SW" or footage from lines. C NE NW

Lease Owner Colorado Oil & Gas Corporation

Lease Name Lee Well No. #1

Office Address 1020 Hoover, Great Bend, Kansas-67530

Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_

Date well completed \_\_\_\_\_ 19\_\_

Application for plugging filed By: Colorado Oil & Gas Corp. 19\_\_

Application for plugging approved \_\_\_\_\_ 19\_\_


Plugging commenced 11/9, 19\_\_ 65

Plugging completed 11/13, 19\_\_ 65

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes



Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well Archie V. Elving

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4564 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	955'	None
				4 1/2"	None	3767'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.


Moved in-Cleaned Cellar.

Killed Gas-Pumped 10 sacks cement to 4400'; working Pipe.

Working Pipe-Shot Well at 3800'. Pulling Pipe.

Pulling Pipe.

Plugged with Mud to 300'. Set Rock Bridge-Dumped 25 sacks cement, filled hole to 30' with Mud. Set Rock Bridge and Capped well with 10 sacks cement.

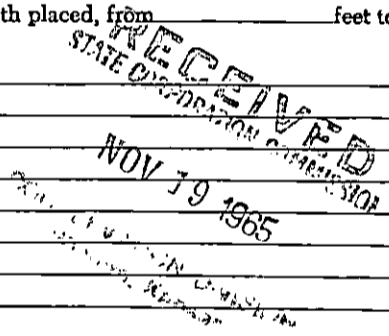

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.

Address P. O. Box 221, Great Bend, Kansas-67530

STATE OF Kansas, COUNTY OF Barton, ss.

J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes  
P. O. Box 221, Great Bend, Kansas-67530  
(Address)

SUBSCRIBED AND SWORN to before me this 18th day of November, 19 65

My commission expires September 24, 1969  
Ethyl P. Irick  
Ethyl P. Irick Notary Public.

# D R I L L E R S   L O G

#1 Lee

CASING RECORD:  
948' of new 8-5/8"  
surface casing

COMPANY: Colorado Oil and Gas  
Corporation  
CONTRACTOR: Strata Drilling, Inc.

DESCRIPTION: C/NE NW  
Section 33-29S-13W  
Pratt County, Kansas

TOTAL DEPTH:  
4735'

COMMENCED: November 19, 1961  
COMPLETED: December 5, 1961

FORMATION	FROM	TO	REMARKS
Sand	0	40	Ran 948' of new 8-5/8" surface casing; set and cemented at 955' with 250 sacks of regular cement, 5% gel and 2% C. C., 200 sacks of regular cement 2% gel and 2% C. C. Plug down at 5:30 P. M. 11-20-1961.
Sand & Gravel	40	165	
Red Bed	165	958	
Red Bed & Shale	958	1610	
Shale	1610	1905	
Lime & Shale	1905	3425	
Lime	3425	3700	
Lime & Shale	3700	3935	
Lime	3935	4416	
Chert	4416	4433	
Lime & Shale	4433	4445	
Lime, Chert & Shale	4445	4470	
Shale & Lime	4470	4493	
Lime	4493	4527	
Lime & Chert	4527	4608	
Lime	4608	4641	
Sand	4641	4651	Ran Log.
Sand & Shale	4651	4681	
Shale & Lime	4681	4735	

Total Depth 4735'

Ran 4602' 4 1/2" O. D. casing; cemented with 150 sacks of common cement with 18 lbs. of salt per sack. Plug down at 3:40 P. M. 12-5-1961.

RECEIVED  
STATE CORPORATION COMMISSION

NOV 5 1965

CONSERVATION DIVISION  
Wichita, Kansas

STATE OF KANSAS )  
                          ) ss.  
COUNTY OF BARTON )

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING, INC.

*Charles W. Steincamp*  
Charles W. Steincamp, President

Subscribed and sworn to before me this 8th day of December, 1961.

*Elaine H. Taylor*  
Elaine H. Taylor, Notary Public

My Commission Expires:  
December 14, 1961