


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

WELL PLUGGING RECORD



Locate well correctly on above  
Section Flat

Pratt County, Sec. 29 Twp. 29 Rge. 13 (E) (W)  
Location as "NE/CNW 1/4 SW 1/4" or footage from lines SW SW NE  
Lease Owner Flynn Oil Company  
Lease Name Lee Well No. 1  
Office Address Thompson Building, Tulsa, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) dry hole  
Date well completed 6-27 1951  
Application for plugging filed 6-27 1951  
Application for plugging approved 6-27 1951  
Plugging commenced 6-27 1951  
Plugging completed 6-27 1951  
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes (his representative supervised the plugging)

Name of Conservation Agent who supervised plugging of this well Mr. Stough, Great Bend, Ks.  
Producing formation Depth to top Bottom Total Depth of Well 4807 Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	300'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Bottom plug 250' - 15 sacks cement  
Filled with mud to 35' - 1/2 sack hulls & 10 sacks cement on top

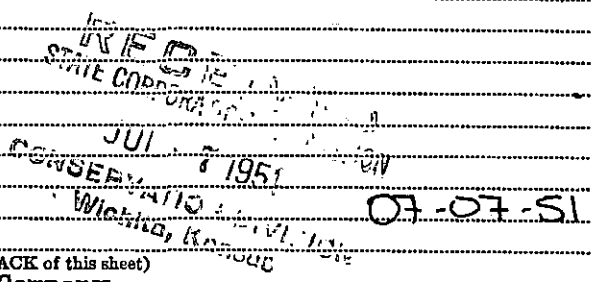

(If additional description is necessary, use BACK of this sheet)  
Correspondence regarding this well should be addressed to Flynn Oil Company  
Address Thompson Building, Tulsa, Oklahoma

STATE OF Oklahoma COUNTY OF Tulsa, ss.  
E. W. Pribyl (employee of owner) or (owner or operator) of the above-described well,  
'being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. BARBOUR DRILLING COMPANY  
(Signature) *E. W. Pribyl*

SUBSCRIBED AND SWORN to before me this 2nd day of July, 1951  
*Murray James Burt*  
Notary Public.

PLUGGING  
FILE SEC 29T 29R 13W  
BOOK PAGE 21 LINE 9

FLYNN OIL COMPANY'S

LEE 1

SW SW NE Section 29-29-13  
Pratt County, Kansas  
Flynn Oil Company

8-5/8" O. D. casing cemented at 300'

Drilling commenced 6-7-51  
Drilling completed 6-27-51

FROM	TO	FORMATION	REMARKS
0'	30'	Clay & rock	
30	205	Clay & sand	
205	300	Red bed	8-5/8" O. D. casing cemented with 250
300	745	Red bed & shells	sacks bulk cement at 300'
745	1955	Shale & shells	*****
1955	2015	Lime (Ft. Riley)	Geological tops (from examination of samples
2015	2035	Lime	and electric log)
2035	2280	Lime & shale	-----
2280	2285	Shale	Douglas sand 3840
2285	2380	Lime & shale	Brown Lansing 3974
2380	2475	Shale & Anhydrite	Lansing- Kansas City 3992
2475	2600	Lime & shale	Basal Pennsylvanian Conglomerate 4409
2600	2820	Shale	Mississippian 4496
2820	2960	Shale & broken lime	Kinderhook shale 4523
2960	3025	Shale & streaks of lime	Viola 4560
3025	3175	Shale	Simpson 4671
3175	3190	Lime & shale	Arbuckle 4773
3190	3510	Shale & lime	*****
3510	3590	Lime	
3590	3665	Lime & shale	
3665	3800	Lime	
3800	3960	Lime & shale	
3960	4468	Lime	
4468	4512	Chert & lime	
4512	4523	Chert	
4523	4617	Lime	
4617	4640	Lime & chert	
4640	4673	Cherty lime	
4673	4684	Chert & lime	
4684	4697	Simpson sand	
4697	4714	Simpson	
4714	4733	Sand	
4733	4770	Shale & sand	
4770	4800	Lime Arbuckle	
4800	4807	Lime	Dry hole - well plugged

T. D. 4807'

**RECEIVED**  
STATE CORPORATION COMMISSION  
JUL - 7 1951  
CONSERVATION DIVISION  
Wichita, Kansas

This is a true copy of the drillers' log-as-shown on our drilling tickets

**PLUGGING**  
FILE SEC 29-29-R (3c)  
BOOK PAGE 91 LINE 9

BARBOUR DRILLING COMPANY  
*E. P. Pribyl*

Subscribed and sworn to before me this 2nd day of July, 1951.

*Merry Jane Burt*  
Notary Public

My commission expires July 27, 1953