


15-057-20079-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

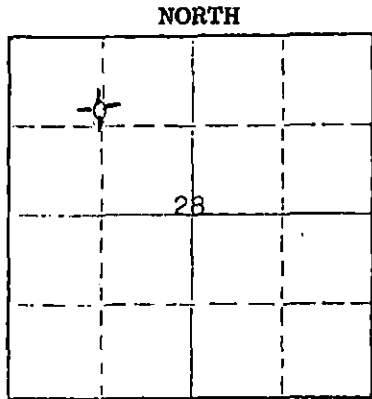

Locate well correctly on above Section Plat

Location as "NE/CNW&SW" or footage from lines Ford County. Sec. 28 Twp. 28S Rge. 21 ~~EB~~ W (W)
Lease Owner T. F. Hodge
Lease Name Kirkpatrick Well No. 1
Office Address 2907 Ft. Worth National Bank, Ft. Worth, Tex. 76102
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 11 1975
Application for plugging filed July 11 1975
Application for plugging approved July 11 1975
Plugging commenced July 12 1975
Plugging completed July 12 1975
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clark Thomas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5210
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Mississippian Lime	SW	5140	5200	8 5/8	294	NONE
RECEIVED STATE CORPORATION COMMISSION JUL 23 1975 CONSERVATION DIVISION Wichita, Kansas						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole loaded with 9.7 lbs. per gallon, 48 viscosity per second mud. Halliburton pump. 50 sack cement plug from 900' to 744'. Pump 35 sack cement plug from 425' to 342'. Set 10 sack cement plug from 36' to 3'. Plug rat and mouse hole with 5 sacks.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company
Address 1720 Wichita Plaza, Wichita, Kansas 67202

STATE OF OKLAHOMA COUNTY OF OKLAHOMA, ss.
W. F. ASHBURN (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. F. Ashburn

2601 N.W. Hwy, OKLAHOMA CITY, OK. 73112
(Address)

Subscribed and sworn to before me this 22nd day of July, 1975

My commission expires April 4, 1979

Cynthia J. Hill
Notary Public.