

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-081-10003-00-01
Spot: CSESW Sec/Twnshp/Rge: 32-28S-34W
660 feet from S Section Line, 3000 feet from E Section Line
Lease/Unit Name: E M GREGG Well Number: 4
County: HASKELL Total Vertical Depth: 5502 feet

Operator License No.: 4549 Conductor Pipe: Size feet: 3178.82
Op Name: ANADARKO PETROLEUM CORPORATION Surface Casing: Size 8.625 feet: 1853 WITH 750 SX CMT
Address: 1201 LAKE ROBBINS DRIVE Production: Size 5.5 feet: 5501 WITH 325 SX CMT
THE WOODLANDS, TX 77380 Liner: Size feet:

Well Type: GAS UIC Docket No: Date/Time to Plug: 12/30/2002 12:00 PM

Plug Co. License No.: 31759 Plug Co. Name: EAGLE WELL SERVICE, INC.

Proposal Rcvd. from: STEVE RIDENHOUR Company: ANADARKO PETROLEUM Phone: (852) 601-3130

Proposed Plugging Method: CIBP @ 4000' WITH 2 SX CMT. 50 SX CMT @ 1900'. 50 SX CMT @ 700'. 20 SX CMT @ 40'.

Plugging Proposal Received By: JIM HOLLAND Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 12/30/2002 4:45 PM KCC Agent: KEVIN STRUBE

Actual Plugging Report:

PBTD 5200'. CIBP @ 5200' & 5419'. PERFS AT 5433-72, 4664-70, 4537-67, 4472-84, 4061-71, & 4110-20'. SET CIBP @ 4000' & DUMPED 2 SX CMT ON TOP BY DUMP BAILER. LOADED THE HOLE AND PRESSURED UP TO 500'. FREE POINT AT 1000'. SHOT CASING AT 900'. 1ST PLUG PULLED UP TO 700' & PUMPED 80 SX CMT. 3RD PLUG PULLED UP TO 300'. CIRCULATED CMT TO SURFACE WITH 110 SX CMT. PULLED CASING OUT OF HOLE. TOPPED OFF WITH 10 SX CMT.

RECEIVED

JAN 23 2003

1-23-03

Remarks: USED 60/40 POZMIX 6% GEL BY ACID SERVICES. RECOVERED 900' OF 5 1/2" CASING.


Plugged through: CSG

District: 0

Signed

Kevin D Strube

(TECHNICIAN)

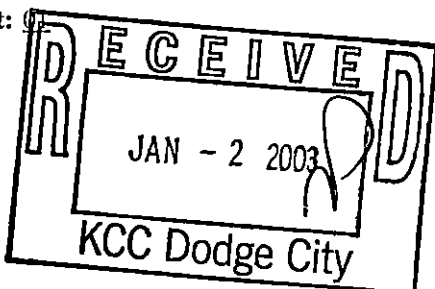

INVOICED

DATE 1-24-03

INV. NO. 2003061106

Form SP 2/3