

RECEIVED
STATE CORPORATION COMMISSION FORM CP-4

MAY 3 1982

CONSERVATION DIVISION
Wichita, Kansas


STATE OF KANSAS
STATE CORPORATION COMMISSION

15-081-10(56-0000)

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Haskell County. Sec. 34 Twp. 28S Rge. 34 W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
660 FNL and 710 FWL of the NW 1/4 SE 1/4
Lease Owner Amoco Production Company
Lease Name K. H. Reimer Well No. 2
Office Address P. O. Box 432 Liberal, KS 67901
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

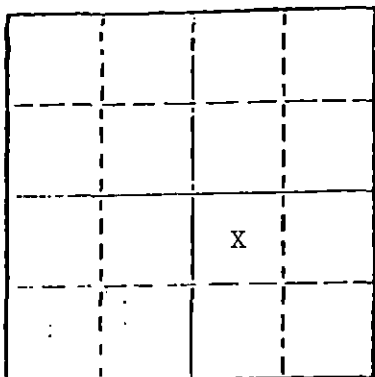

Locate well correctly on above
Section Plot

Date Well completed Jan 24 1964
Application for plugging filed March 10 1982
Application for plugging approved March 16 1982
Plugging commenced April 22 1982
Plugging completed April 26 1982
Reason for abandonment of well or producing formation
Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5600
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Morrow		5166		8-5/8"	725	0
				5-1/2"	5574	1258

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set cast iron bridge plug at 4150 with 2 sacks of Class H cement on top. Shot pipe at 1258' and pumped 30 sacks gel and 45 sacks cement. Pumped 98 sacks of cement at 781'. Put bridge and 18 sacks of cement from 50' to 6'. Cut off 8-5/8" casing at 5' below ground level and welded on plate.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Midwest Casing Pullers

STATE OF Kansas COUNTY OF Seward, ss.
R. C. Carlson (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. C. Carlson
P. O. Box 432 Liberal, KS 67901
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of April, 1982

My appointment expires 4-28-85

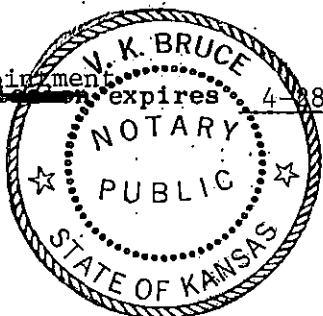

V. K. Bruce V. K. Bruce
Notary Public.

GAMMA RAY

API UNITS

DEPTHS


INTERVAL TRANSIT TIME

MICROSECONDS PER FOOT

T_{3R1} 3R₂

0 120
120 140

100 70
160 130

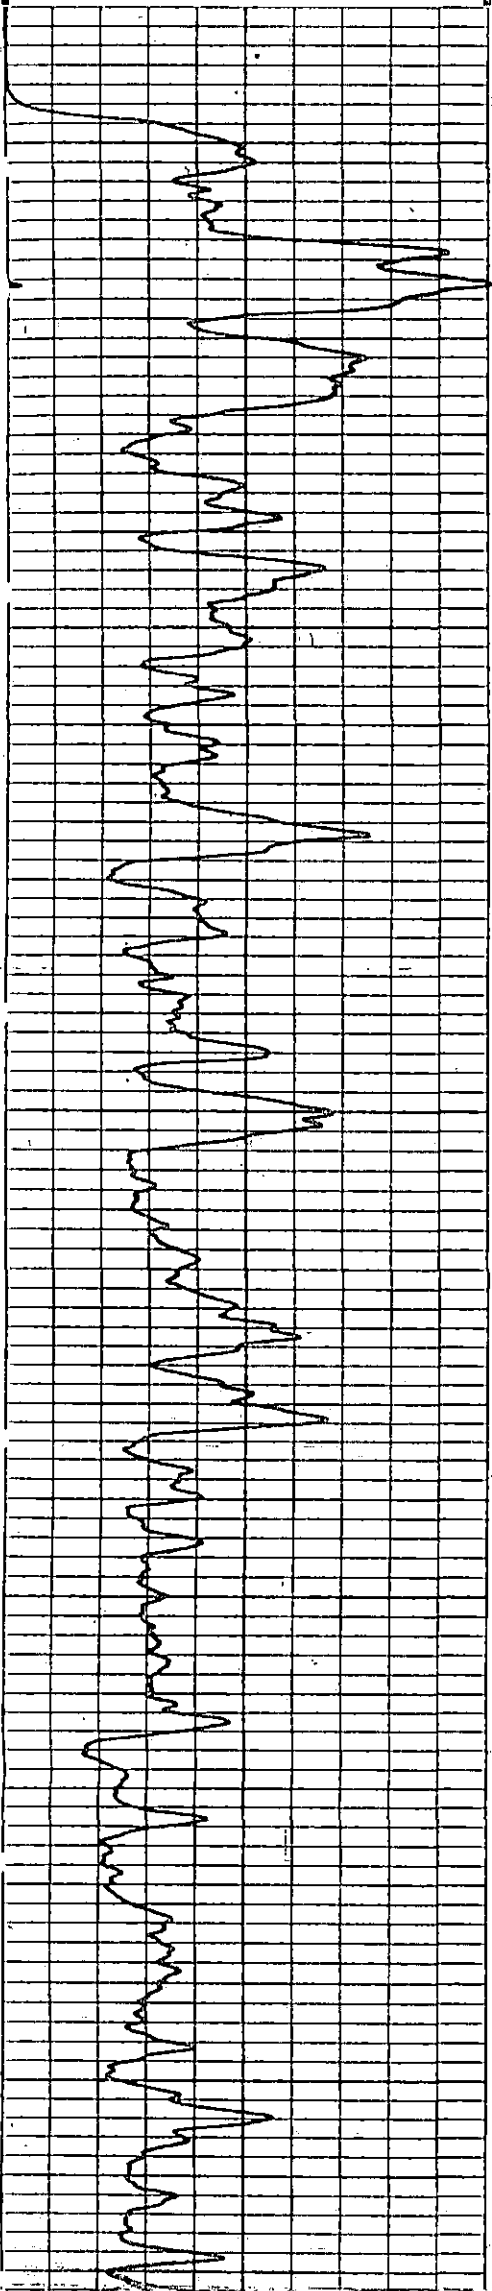

3500

3600

5700

