


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

15-081-10100-0001

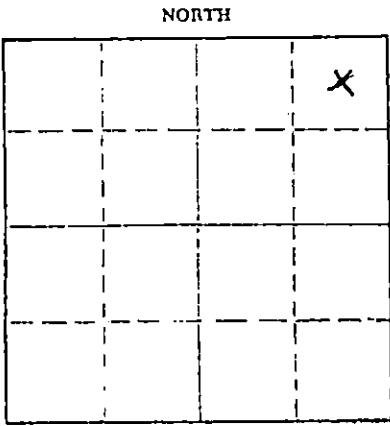

Locate well correctly on above Section Plat

Haskell County, Sec. 8 Twp. 28 Rge. 34 ~~(E)~~ X(W)  
Location as "NE/CNW/SW" or footage from lines C NE NE  
Lease Owner Cities Service Oil & Gas Co.  
Lease Name Fletcher F Well No. #1  
Office Address Box 850, Sublette, KS 67877  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed 9-22-60, Reopened 12-8-64  
Application for plugging filed 8-15 1985  
Application for plugging approved 8-16 1985  
Plugging commenced 8-26 1985  
Plugging completed 8-28 1985  
Reason for abandonment of well or producing formation Casing leak

If a producing well is abandoned, date of last production November 1983  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well  
Producing formation Morrow Depth to top 5237 Bottom 5356 Total Depth of Well 5723 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Morrow	oil	5237	5356	8-5/8"	780'	None
				5-1/2"	5452	1329'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped 24 bbls. 9.5# mud in casing, shot casing at 1329', pumped 34 bbls. 9.5# mud ahead of plug, pumped 50 sks. common cement from 1329' to 1229', kept losing circulation so pumped 220 bbls. 9.5# mud with cotton seed hulls, pumped 24 bbls. 9.5# mud ahead of plug, pumped 50 sks. common cement from 820' to 720', pumped 6 bbls. 9.5# mud, waited 2 hours then pumped 10 sks. common cement from 40' to surface.

Name of Plugging Contractor DACO, INC.  
Address P. O. Drawer 3010, Borger, TX 79008-3010

STATE OF Texas COUNTY OF Hutchinson

JACK PAINTER (employee of owner) or (owner or operator) of the above-described well, being first duly sworn and says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



JUDY E. STARK  
Notary Public, State of Texas  
My Commission Expires

(Signature) Jack Painter Agent  
Drawer 3010, Borger, TX 79008-3010  
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of September, 1985

My commission expires 8-3-89  
Judy Stark Notary Public

RECEIVED  
STATE CORPORATION COMMISSION

SEP 26 1985  
9-26-85  
CONSERVATION DIVISION  
Wichita, Kansas



JUDY E. STARK  
Notary Public, State of Texas  
My Commission Expires 8-3-89