


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

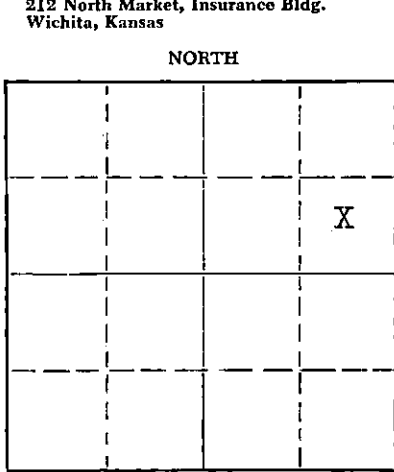

Haskell County. Sec. 32 Twp. 28 Rge. (E) 34 (W)
Location as "NE/CNWxSWx" or footage from lines C-Se-NE
Lease Owner George B. McClellan
Lease Name McCoy Well No. 1
Office Address P.O. Box 1216
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 7-7 1962
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 7-7 1962
Plugging completed 7-7 1962
Reason for abandonment of well or producing formation Hydrocarbons could not be economically produced due to salt water
If a producing well is abandoned, date of last production None 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes, Mr. Hugh Scott of Liberal, Kansas

Name of Conservation Agent who supervised plugging of this well Hugh Scott
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
St. Louis	Water & Oil	5420	5463	2-7/8"	5400'	4870'
Morrow	Water	5330	5338	2-7/8"	5400'	4870'
Marmaton	Water	4704	4720	4-1/2"	4899'	1090'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

After testing the St. Louis & Morrow zones through the 2-7/8" tubing each zone was plugged and the 2-7/8" removed from 4870'. The Marmaton was tested through the 4-1/2" casing. Fifty (50) sacks pozmix cement was used to plug this zone from 4707' to 4200'. Only 1089' of 4-1/2" casing could be pulled from the hole. At 790' a 25 sack cement plug was spotted. After removing the 4-1/2", a 30' cement plug was placed in the top of the 8-5/8" surface casing. The plug at 790' is at the base of the surface casing.

RECEIVED
STATE CORPORATION COMMISSION
JUL 16 1962 7-16-62
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor _____
Address _____

STATE OF Kansas COUNTY OF Haskell, ss.

_____, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
(Address) Liberal, Kansas

SUBSCRIBED AND SWORN TO before me this 7th day of July, 1962

My commission expires September 16, 1964 [Signature] Notary Public.

McCoy #1

15-081-10106-0000

SE, NE Section 32-28s-34w

Haskell County, Kansas

Casing Record:

Ran 32 jts of 8-5/8" csg, set at 762.43' G.L., Cemented with 300 sacks Lite Wate 3% cc and 150 sacks common 3% cc.

Commenced: 5-8-62
Completed: 6-7-62

Formation:


	<u>From</u>	<u>To</u>	
Top soil and sand	0	430	
Sand and shale	430	680	
Red Rock	680	776	
Red Bed and shale .	776	820	
Red Bed and Sand	820	1300	
Shale and red bed	1300	1720	
Red bed and anhydrite	1720	1990	
Red bed and shale	1990	2200	
Shale and shells	2200	2342	
Shale and Lime	2342	3051	
Lime	3052	3125	
Lime and shale	3125	3241	
Lime	3241	3628	
Lime and chalk	3628	3780	
Lime	3780	5560	RTD

STATE OF KANSAS

SS

COUNTY OF SEWARD

I Hereby affirm that the above and foregoing is a true and correct copy of the log of the McCoy #1 well, located SE,NE of Section 32-28s-34w, Haskell County, Kansas.

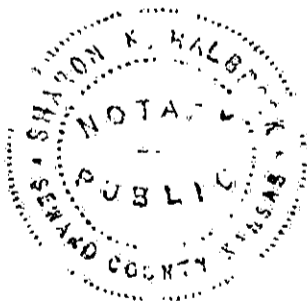

GEORGE B. McCLELLAN DRILLING

C. J. McClellan
C. J. McClellan, Manager

Subscribed and sworn to before me a notary public this 15th day of May, 1962.

Sharon K. Halbrook
Sharon K. Halbrook, Notary Public

My Commission expires: September 26, 1965