

STATE OF KANSAS
STATE CORPORATION COMMISSION


15-081-20194-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Haskell County. Sec. 3 Twp. 28 Rge. 32 R/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines C NW/4

Lease Owner Amoco Production Company
Lease Name Joy Watson Well No. 1
Office Address P. O. Box 432, Liberal, Kansas 67901
Character of Well (Completed as Oil, Gas or Dry Hole) _____

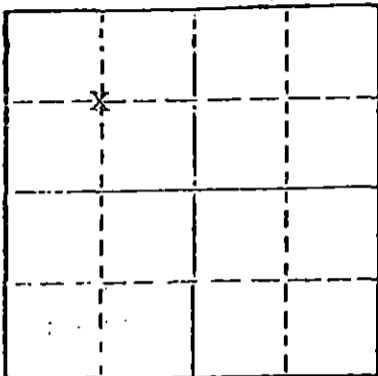

Dry Hole
Date Well completed 10-27 19 80
Application for plugging filed 9-5 19 80
Application for plugging approved 9-15 19 80
Plugging commenced 10-22 19 80
Plugging completed 10-27 19 80
Reason for abandonment of well or producing formation _____

Dry Hole
If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas
Producing formation None Depth to top _____ Bottom _____ Total Depth of Well 2970
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Chase	Sand, Lime	2724	2970	8 5/8	616	0
				5 1/2	2980	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from RECEIVED feet to _____ feet for each plug set. PBD of 2845'. Spot 30 sx cmt at 2845' Spot 50 sx at 2700'. Spot 35 sx at 800. Spot 10 sx from 50' to 5'. Cut 8 5/8" csg 4 ft. below ground level and weld on cap.

NOV - 3 1980
CONSERVATION DIVISION
Wichita, Kansas
11-3-80

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Amoco Production Company with the use of a cementing service company (Dowell)


STATE OF Kansas COUNTY OF Seward, ss.
Gale McCord (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Gale McCord Gale McCord
P. O. Box 432, Liberal, KS 67901
(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of October, 19 80

J. L. Dressen
Notary Public.



AMOCO PRODUCTION CO.

JOY WATSON G.U. #1 WELL
HASKELL COUNTY, KANSAS

15-081-20194-0000

OPERATIONS COMMENCED: 3/5/80

OPERATIONS COMPLETED: 3/9/80

DRILLING LOG

3/5	0 - 620	Sand, Red Bed
3/6	620 - 1190	Red Bed
3/7	1190 - 2318	Red Bed, Sand
3/8	2318 - 2804	Shale, Lime

CASING RECORD

3/6	Ran 14 jts of 24# casing. Set at 620'. Cemented with 300 sks. of 65/35 Poz, 6% Gel, 2% c.c. Followed with 150 sks. of Class H, 3% c.c.
3/9	Ran 71 jts. of 5½", 14# casing. Set at 2927'. Cemented with 650 sks. of 65/35 Poz, 6% Gel, plus 150 sks. of 50/50 Poz, 10% Salt.

RECEIVED
STATE CORPORATION COMMISSION

SEP 12 1980

CONSERVATION DIVISION
Wichita, Kansas