


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Kiowa County. Sec. 25 Twp. 27S Rge. 19W E/W
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines _____
C NE SE

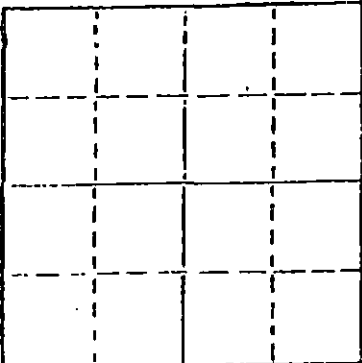

Locate well correctly on above
Section Plat

Lease Owner TGT Petroleum Corporation
Lease Name FIRST STATE BANK "A" Well No. #1
Office Address 209 E. William, Wichita, KS. 67202
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Dry Hole

Date Well completed February 6 1981
Application for plugging filed February 6 1981
Application for plugging approved February 6 1981
Plugging commenced February 6 1981
Plugging completed February 6 1981

Reason for abandonment of well or producing formation _____
No commercial quantity of oil or gas encountered.
If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. U. Leslie
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5030'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

T.D. @ 5030'
Set 1st Plug @ 600' with 50 sx.
Set 2nd Plug @ 385' with 40 sx.
Set 3rd Plug @ 50' Solid Bridge with 10 sx.
Rathole with 15 sx., 50-50 posmix, 6% gel.

Plug was down @ 10:00 a.m., 2/06/81
State Plugger - M. U. Leslie

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.



STATE OF Kansas COUNTY OF Sedgwick, ss.
Jack L. Partridge, Asst. Sec./Treas. (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge
801 Union Center, Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of February, 1981

My commission expires Feb. 4, 1985

Suzanne M. Hofer
Suzanne M. Hofer
Notary Public



CONTRACTOR'S WELL LOG

OPERATOR: TGT Petroleum Corporation
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: FIRST STATE BANK "A" #1
 LOCATION: C NE SE, Section 25-27S-19W
 Kiowa County, Kansas
 SPUD DATE: 1/19/81
 COMPLETION DATE: 2/06/81

0	390	Sand & Red Bed
390	1075	Shale
1075	1852	Lime & Shale
1852	2127	Shale
2127	5030	Lime & Shale
	5030	Rotary Total Depth

Spud hole @ 9:15 p.m., 1/19/81. Drilled 390' of a 12 1/4" hole. Ran 10 jts. of 8 5/8" - 24# casing (tally 376.47) Set @ 386.47'. Cemented with 350 sx. of common 2% gel, 3% c.c. Cement did circulate. Job was completed @ 5:00 a.m., 1/20/81.

T.D. @ 5030'. Set 1st Plug @ 600' with 50 sx. Set 2nd Plug @ 385' with 40 sx. Set 3rd Plug @ 40' Solid Bridge with 10 sx. Rathole with 15 sx. Job was completed @ 10:00 a.m., 2/06/81. State Plugger - M. U. Leslie, 50-50 posmix, 6% gel.

SAMPLE TOPS:

Anhydrite 1173'
 B/Anhydrite 1203'

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Jack L. Partridge, Assistant Secretary/Treasurer of Abercrombie Drilling, Ince. does hereby state that the above and foregoing is a true and correct copy of the log of the FIRST STATE BANK "A" #1, C NE SE, Section 25-27S-19W, Kiowa County, Kansas.

BY: Jack L. Partridge
 Jack L. Partridge, Asst. Sec./Treas.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 10th day of February, 1981.

Suzanne M. Hofer
 Suzanne M. Hofer, Notary Public

Commission Expires 2/4/85

