

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217

WELL PLUGGING RECORD

Kiowa County, Sec. 25 Twp. 27 Rge. (E) 19 (W)

Location as "NE/CNW/SW" or footage from lines C SE SW
Lease Owner TGT Petroleum Corporation
Lease Name Dunn Well No. 2
Office Address Suite 350, Sutton Place, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced April 9 1974
Plugging completed April 15 1974
Reason for abandonment of well or producing formation depleted

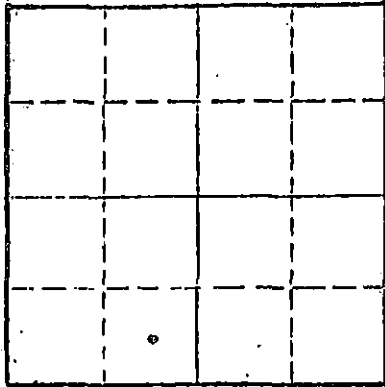

Locate well correctly on above Section Plot

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4825 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	328'	8 5/8"	328'	none
			4808'	4 1/2"	4808'	2219.75

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded back to 4790' and dumped 4 sacks of cement.

Halliburton plugged well with 2 sacks of hulls, 10 sacks of gel and 100 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
APR 19 1974
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor PIPE PULLERS, INC.
Address Box 486, Ellinwood, Kansas 67526

STATE OF KANSAS COUNTY OF BARTON ss.
Evelyn Roth (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth
Ellinwood, Kansas

Subscribed and Sworn to before me this 18th day of April 1974

George A. Meyer Notary Public

My commission expires Feb. 10, 1975

ROTARY DRILLERS' LOG

OPERATOR: Rosen Oil Company DRILLING COMMENCED: May 21, 1969
 260 Sutton Place
 Wichita, Kansas

CONTRACTOR: Graves Drilling Co., Inc. DRILLING COMPLETED: May 31, 1969
 505 Union Center
 Wichita, Kansas

CASING RECORD: 8 5/8" surface casing, LOCATION: Dunn # 2
 set at 328', with 300 C SE SW Sec. 25-27S-19W
 sacks of cement. Kiowa County, Kansas

0	-	18	Soil
18	-	328	Sand and shale
328	-	606	Shale, sand and red bed
606	-	621	Anhydrite
621	-	1192	Red bed and shale
1192	-	1225	Anhydrite
1225	-	1900	Shale and shells
1900	-	2315	Shale
2315	-	3250	Lime and shale
3250	-	3419	Lime
3419	-	3895	Lime and shale
3895	-	4052	Lime
4052	-	4058	Shale
4058	-	4200	Lime and shale
4200	-	4549	Lime
4549	-	4691	Lime and shale
4691	-	4754	Lime
4754	-	4804	Lime and shale
4804	-	4825	Chat and lime
4825	-		Total Depth

RECEIVED
 STATE CORPORATION COMMISSION
 FEB 19 1974
 CONSERVATION DIVISION
 Wichita, Kansas

I hereby certify the foregoing statements to be true and correct, to the best of my knowledge.

GRAVES DRILLING COMPANY, INC.


By John C. Graves
 John C. Graves

STATE OF KANSAS)
 SEDGWICK COUNTY) ss

Subscribed and sworn to before me, a Notary Public, this 3rd day of June, 1969.

My Commission Expires: July 28, 1970

Mary Ann Scott
 Mary Ann Scott, Notary Public



RECEIVED JUN 4 1969