


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

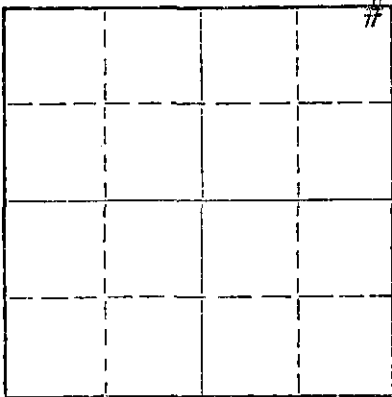

Locate well correctly on above
Section Plat

Pratt County. Sec. 8 Twp 27 Rge. 14 (E) W (W)
Location as "NE/CNW/SW" or footage from lines NE NE NE
Lease Owner Robert Austin
Lease Name Eubank Well No. 1
Office Address Box 159 Stafford, Ks.
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced Mar. 1, 1969
Plugging completed Mar. 4, 1969
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ralph Warren
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	858'	None
				5 1/2	4566'	2170'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.
Plugged back with sand from 3950' to 3900'. Mixed and dumped 5 sx. of cement from 3900' to 3860'. Pulled casing. Mudded hole to 260'. Set 10' rock bridge from 260' to 250'. Mixed and dumped 25 sx. of cement from 250' to 175'. Mudded hole from 175' to 40'. Set 10' rock bridge from 40' to 30'. Mixed and dumped 10 sx. of cement from 30' to base of the cellar.

RECEIVED STATE CORPORATION COMMISSION
MAR 17 1969 CONSERVATION DIVISION
Wichita, Kansas


RECEIVED STATE CORPORATION COMMISSION
MAR 13 1969 CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Russ Casing Pulling Inc.
Address Box 1082 Great Bend, Ks.

STATE OF _____, COUNTY OF _____, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well, as filed and that the same are true and correct. So help me God.

(Signature) Robert L. Austin
P.O. Box 159 Stafford, Kansas
(Address)



SUBSCRIBED AND SWORN to before me this 14 day of March 1969
Irene L. Benton
Notary Public.