

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Kingman County, Sec. 2 Twp. 27S Rge. 8 (E) (W)

Location as "NE/CNWxSWx" or footage from lines CE/2-SE/4-NE/4

Lease Owner Barbara Oil Company

Lease Name Mueller Well No. 1

Office Address 509 Union Center, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed August 8 19 70

Application for plugging filed August 8 19 70

Application for plugging approved August 8 19 70


Plugging commenced August 8 19 70

Plugging completed August 8 19 70

Reason for abandonment of well or producing formation Hole dry

If a producing well is abandoned, date of last production - 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

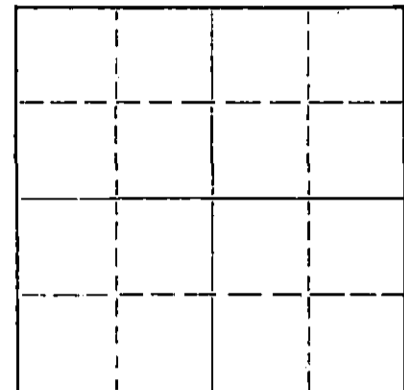

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein

Producing formation - Depth to top - Bottom - Total Depth of Well 3677 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface soil		0	20	8 5/8		
Red beds		20	218	8 5/8	218	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with mud from 3677' (TD) to 200'

Placed bridge plug at 200'

Ran 25 sx. cement from 200' to 125'

Mud from 125' to 40'

Placed bridge plug at 40'

Ran 10 sx. cement to surface

Put 2 sx. cement in rat hole

RECEIVED
STATE CORPORATION COMMISSION

AUG 13 1970

CONSERVATION DIVISION
Wichita, Kansas

7-13-70

Name of Plugging Contractor Gabbert-Jones Inc. (If additional description is necessary, use BACK of this sheet)

Address 830 Sutton Place, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.

R. Douglas Myers (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) R. Douglas Myers

509 Union Center, Wichita, Kansas 67202 (Address)

SUBSCRIBED AND SWORN TO before me this 12th day of August, 19 70

My commission expires August 12, 1971

Doris Oglesbee
Doris Oglesbee



GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

MUELLER #1
 C E/2 SE NE Section 2-27S-8W
 Kingman County, Kansas

Commenced: August 1, 1970
 Completed: August 8, 1970

OPERATOR - Barbara Oil Company

DEPTH		FORMATION	REMARKS
From	To		
0	20	Surface soil	
20	219	Red bed	Ran 6 joints 8-5/8" casing, set @ 218' w/175 sacks cement.
219	625	Red bed and shale	
625	1125	Shale and shells	
1125	3490	Shale and lime	
3490	3677	Lime	
3677		TD	Dry and abandoned.

I, JAMES S. SUTTON, II, certify this is a correct copy of the Drillers' Log for the well drilled in the C E/2 SE NE Section 2-27S-8W, Kingman County, Kansas, to the best of my knowledge and belief.

James S. Sutton, II

 JAMES S. SUTTON, II

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)


Before me, the undersigned, a Notary Public within and for said County and State, on this 11 day of August, 1970, personally appeared James S. Sutton, II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.)

My Commission Expires Feb. 1, 1972.

Barbara J. Layton

 Barbara J. Layton, Notary Public



RECEIVED
 STATE CORPORATION COMMISSION
 AUG 13 1970
 CONSERVATION DIVISION
 Wichita, Kansas