

10-8

2-070741

STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - Plugging Section  
130 S. Market, Room 2078  
Wichita, Kansas 67202

API NUMBER: 15-155-21,115-0000

C SE NW, SECTION 33 TOWNSHIP 25 RANGE 8W

OPERATOR LICENSE # 3536 3300 FEET FROM S SECTION LINE

OPERATOR RAMCO ENERGY CORPORATION 3300 FEET FROM E SECTION LINE

NAME & P.O. BOX 340

ADDRESS GREAT BEND, KS 67530

LEASE NAME: CAROLYN MINOR #1

COUNTY: RENO 129.19

WELL TOTAL DEPTH: 3975'

PIPE: 4 1/2" @ 3975'

SURFACE CASING: 8 5/8" @ 325'

ABANDONED OIL WELL  GAS WELL  INPUT WELL  SWD  D&A

OTHER WELL AS HEREINAFTER INDICATED: \_\_\_\_\_

PLUGGING CONTRACTOR: MIKE'S TESTING & SALVAGE INC

ADDRESS: P.O. BOX 467, CHASE, KS 67524 LICENSE: 31529

COMPANY TO PLUG AT: HOUR: 10:30 DAY: 8 MONTH: 10 YR: 1997

PLUGGING PROPOSAL RECEIVED FROM: MIKE KELSO

COMPANY NAME: MIKE'S TESTING & SALVAGE INC PHONE: (316) 938-2943

WERE: SAND TO 3770' AND 4 SACKS

35 SACKS AT 1300'

35 SACKS AT 750'

375' TO 0'

PLUGGING PROPOSAL RECEIVED BY: SVG

PLUGGING OPERATIONS ATTENDED BY AGENT? ALL (  ) PART (  ) NONE (  )

COMPLETED: HOUR: 12:30 DAY: 8 MONTH: 10 YEAR: 1997

ACTUAL PLUGGING REPORT: SANDED BOTTOM TO 3770' AND 4 SACKS OF COMMON. SHOT 4 1/2"

CASING OFF AT 3000'. PULLED TO 1300', PUMPED 35 SACKS. PULLED TO 750' AND

PUMPED 35 SACKS. PULLED TO 375', CIRCULATED CEMENT TO SURFACE.

RECEIVED

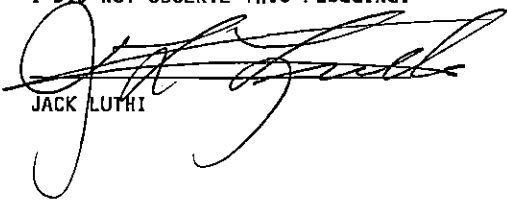
10-10-97  
OCT 10 1997

REMARKS: 60/40 POZ 4% GEL UNITED #5768 CONSERVATION DIVISION WICHITA, KS

INVOICED

DATE \_\_\_\_\_  
INV. NO. 49288

I DID NOT OBSERVE THIS PLUGGING.

  
JACK LUTHI