

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-095-01025-00-00
Spot: NWNWSW Sec/Twnshp/Rge: 36-29S-7W
2310 feet from S Section Line, 330 feet from W Section Line
Lease Name: KREHBIEL Well #: 3
County: KINGMAN Total Vertical Depth: 4232 feet

Operator License No.: 8740
Op Name: BRAMWELL PETROLEUM, INC.
Address: 12826 SW 77 AVE
ZENDA, KS 67159

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4232	2803	150 SX
SURF	8.625	261		200 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 02/27/2015 12:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: JAMIE Company: MIKE'S TESTING & SALVAGE, INC Phone: _____

Proposed Plugging Method: SAND TO 4060 & 5 SKS. 35 SXS 1250', 35 SXS 550', CIRCULATE AT 310'.

Plugging Proposal Received By: STEVE VANGIESON WitnessType: NONE
Date/Time Plugging Completed: 03/02/2015 4:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

THE PERFS WERE COVERED WITH SAND TO 3041' & CAPPED WITH 5 SKS CEMENT. THE CASING WAS RECOVERED FROM 2803' & PULLED TO 1250' WHERE 35 SXS OF CEMENT WAS SPOTTED. PULLED CASING TO 550' WHERE 35 SXS OF CEMENT WAS SPOTTED. PULLED CASING TO 310' & CIRCULATED WITH 90 SXS OF CEMENT. TOP PLUG FELL TO 190'. WILL TOP OFF. 8-24-2015 RAN TUBING TO 190' & CIRCULATED CEMENT TO SURFACE WITH 65 SXS CEMENT.

Perfs:

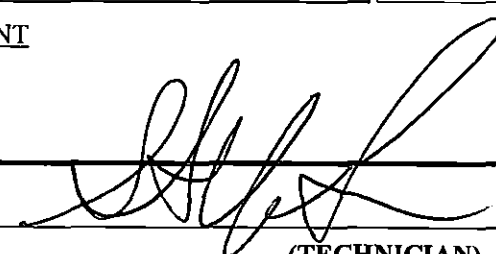
Top	Bot	Thru	Comments
4116	4171		CSG

Remarks: COPELAND CEMENT & HURRICAN CEMENT

Plugged through: CSG

District: 02

Signed

 9/2/15 CLKM

(TECHNICIAN)

KCC WICHITA

AUG 28 2015

RECEIVED