

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Kiowa County, Sec. 33 Twp. 27S Rge. 20 (E) (W) X

Location as "NE/CNW/SW" or footage from lines C SE NE

Lease Owner Walters Drilling Company

Lease Name Cate Well No. 1

Office Address 400 Insurance Building Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19__

Application for plugging filed 10-17-66

Application for plugging approved 10-18-66


Plugging commenced 10-22-66

Plugging completed 11-4-66 19__

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

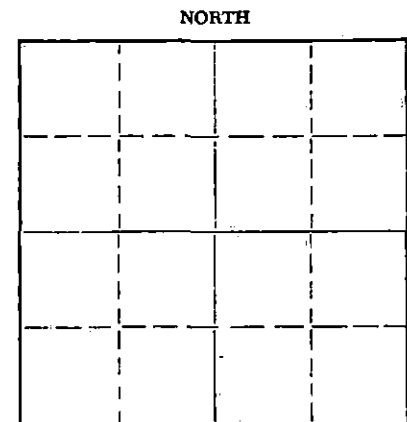

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Archie V. Elving

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4932 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	550	None
				4 1/2	None	4027

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Moved in. Rigged up. Cleaned out cellar. Working pipe.

Sanded to 4850'. Dumped 3 sacks of cement. Shot pipe at 4320'. Working pipe.

Working pipe. Circulating. (Globe Oil Well Cementing, Inc. spotted 75 bbls. of oil.)

Working pipe. Shot pipe at 4200' - 4100' and 4015'. Fishing out shooting line.

Working pipe. Pulling pipe. Bailing water. Pushed plug to 400' rock bridge. Dumped 6 sacks of cement.

Bailing hole dry. Dumped 19 sacks of cement. Filled hole and rock bridge. Capped well with 10 sacks of cement. Well completed.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.

Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes

P. O. Box 221 Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 9 day of November, 19 66

My commission expires May 27, 1969

Notary Public.

DRILLER'S LOG

COMPANY: WALTERS DRILLING CO. ET AL
510 Orpheum Building
Wichita, Kansas 67202

WELL NAME: CATE #1
C SE NE SEC. 33-27S-20W
Kiowa County, Kansas

CONTRACTOR: WALTERS DRILLING CO.
510 Orpheum Building
Wichita, Kansas 67202

ROTARY DRILLING COMMENCED: February 2, 1966
ROTARY DRILLING COMPLETED: February 17, 1966

ELEVATION: 2301 KB

CASING RECORD: 8 5/8" @ 550' w/ 290 sacks cement

LOG

0 - 120	Sand
120 - 540	Shale
540 - 550	Sand
550 - 721	Red Bed and Shale
721 - 740	Blaine Lime
740 - 1175	Red Bed, Shale and Shells
1175 - 1284	Shale
1284 - 1320	Anhydrite
1320 - 1540	Shale and Lime Streaks
1540 - 1825	Lime w/ Streaks Shale
1825 - 2100	Shale and Shells
2100 - 2270	Shale and Lime
2270 - 2455	Shale
2455 - 2600	Lime and Shale
2600 - 2725	Lime
2725 - 3165	Lime and Shale
3165 - 3310	Shale and Lime
3310 - 3490	Lime and Shale
3490 - 3780	Shale and Lime
3780 - 3935	Lime and Shale
3935 - 4140	Shale and Lime
4140 - 4255	Lime and Shale
4255 - 4705	Lime
4705 - 4735	Lime and Shale
4735 - 4875	Lime
4875 - 4899	Core
4899 - 4939	Lime
<u>4939</u>	<u>Rotary Total Depth</u>

The undersigned, Robert F. Walters, hereby certifies, in behalf of said company that the above log is a true and correct log of the formations encountered in drilling the above well as reflected by the Daily Drilling Reports.


WALTERS DRILLING CO.

BY

Robert Walters

ROBERT F. WALTERS, Partner

Subscribed and sworn to before me
this 21st day of February, 1966.



Juanita M. Green
Juanita M. Green, Notary Public

My Commission Expires: October 4, 1967