


Replug no charge

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

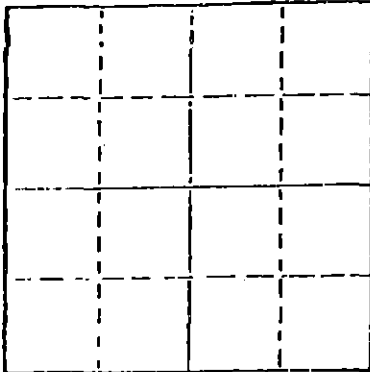

Locate well correctly on above
Section Plat

Kingman County. Sec. 20 Twp. 27 Rge. 10 E/W
Location as "NE/CNW¹SW¹" or footage from lines

Lease Owner Northern Natural Gas Co.
Lease Name W. B. Rouse Well No. 1
Office Address P.O. Box 88, Lyons, Kansas
Character of Well (Completed as Oil, Gas or Dry Hole)

Dry Hole
Date Well completed Feb. 27, 1941
Application for plugging filed June 20, 1977
Application for plugging approved July 1, 1977
Plugging commenced Dec. 2, 1977
Plugging completed Dec. 7, 1977
Reason for abandonment of well or producing formation

Dry Hole
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Bill Owen, 408 S. Oak Pratt, Ks.
Producing formation Depth to top Bottom Total Depth of Well 4168'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Viola Lime	water	4162	4168	10"	495'	None
lime	show oil	3715	3735	7"	4165'	2750
Kansas City Lime	water & s. o.	3571	3578			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Halliburton mixed and spotted 100 sacks of 50-50 poz mix cement through the drill pipe from 3597' back to 3099'. Halliburton mixed and spotted 50 sacks of common cement from 470' back to 357'. Halliburton mixed and spotted 25 sacks of common cement from 94' back to 38'.

RECEIVED
STATE CORPORATION COMMISSION

DEC 16 1977

CONSERVATION DIVISION

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor

STATE OF Kansas COUNTY OF Rice, ss.
W. J. Luck (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

W. J. Luck P.O. Box 88, Lyons, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of December, 1977

My commission expires 11-3-79

David L. Allen

Notary Public.

