


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Kingman County. Sec. 20 Twp. 27S Rge. 10 W/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
C N/2 S/W

Lease Owner Northern Natural Gas Company
Lease Name A. J. Conley Well No. 2
Office Address P.O. Box 88, Lyons, Kansas 67554
Character of Well (Completed as Oil, Gas or Dry Hole)

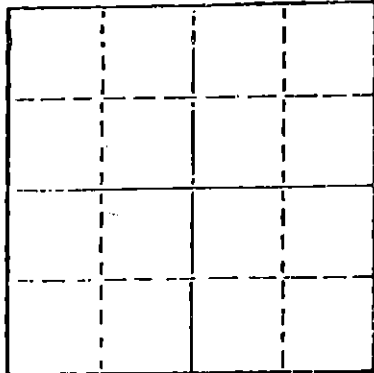

Locate well correctly on above
Section Plot

Gas
Date Well completed March 4 1938
Application for plugging filed 1977
Application for plugging approved 1977
Plugging commenced June 26, 1978
Plugging completed June 28, 1978
Reason for abandonment of well or producing formation
bad casing

If a producing well is abandoned, date of last production
June 19, 1978

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Owens, Pratt, Kansas
Producing formation Viola Depth to top 3926 Bottom 3950 Total Depth of Well 3950
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Halliburton mixed and spotted 100 sks. of common cement from TD to 3950' back
to 3400'. Filled hole to 1500' with mud. Set Baker cast iron bridge plug at
1500'. Filled hole to 450' with mud. Circulated 200 sks. of common cement from
450' back to surface.

RECEIVED
STATE CORPORATION COMMISSION
JUL 11 1978

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Sterling Drilling Company

CONSERVATION DIVISION
Wichita, Kansas

STATE OF Kansas COUNTY OF Rice, ss.
W. J. Luck (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) W. J. Luck
P.O. Box 88, Lyons, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of July, 1978

My commission expires 11-18-81

Jalayne D. Young
Notary Public.

