

WELL PLUGGING RECORD

		#2.

Reno County, Sec. 8 Twp. 26S Rge. 4 (E) (W)
 Location as "NE/CNW¼SW¼" or footage from lines SE¼, SE¼, SE¼.
 Lease Owner. Amerada Petroleum Corp.
 Lease Name. John F. Moore Well No. #2
 Office Address. Box 2040, Tulsa, Okla.
 Character of Well (completed as Oil, Gas or Dry Hole) Oil Well
 Date well completed. July 17, 19 37
 Application for plugging filed. 19
 Application for plugging approved. 19
 Plugging commenced. March 23, 19 49
 Plugging completed. March 28, 19 49
 Reason for abandonment of well or producing formation.
 Unprofitable to Operate.
 If a producing well is abandoned, date of last production. January 5, 19 49
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

OIL, GAS OR WATER RECORDS

CASING RECORD

[illegible]

Dumped in 6 sacks of regular Portland Cement with Ball Dump Bailer at 4010'. Filled hole with mud up to within 175' of top, dumped in 25 sacks of regular cement at 175'. Filled hole with mud up to within 8' of top of surface casing in base of cellar. Dumped in 8 sacks of regular cement filling hole to top of surface casing in base of cellar as required by State Plugger Mr. Ruel Durkee of McPherson, Kansas. Well Plugged and Abandoned.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Amerada Petroleum Corp.
Address Box 2040
Tulsa, Okla.

STATE OF Oklahoma, COUNTY OF Tulsa, SS.
C. H. Rose (employee of owner) or (owner or operator) of the above-described well,
 being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well, as filed and that the same are true and correct. So help me God.

(Signature)

SUBSCRIBED AND SWORN to before me this 28 day of April, 1949

My commission expires

Notary Public.


Well No. 2
 Farm John F. Moore
 Elevation 1485' - Derrick Floor
 Location SE/4 SE/4 SE/4
 330' North of South line
 2310' East of West line of Quarter Section
 Section 8-26S-4W
 Reno County, Kansas
 Company Amerada Petroleum Corporation
 Commenced Drilling 6-10-37
 Completed Drilling 7-17-37
 State Potential Pumped 1058 bbls. oil through 3" tubing, 4% BS & water.

15-155-01006-0000

CASING RECORD:	SIZE	WEIGHT	FEET	CEMENT	PERFORATIONS
	13" OD	40#	176	175 sacks	None
	7" OD	20#	4010	200 sacks	None

FORMATION:

Red bed & Sand	0	35	Rotary tools		
Shale	35	65	used from	0	4012'
Sand	65	78			
Shale	78	134	Cable tools		
Sand	134	144	used from	4012'	4024'
Shale	144	176			
Shale & Shells	176	352			
Shale, Shells & Salt	352	629			
Shale & Salt	629	773			
Lime	773	832			
Shale	832	853			
Lime	853	891			
Lime & Shale	891	1043			
Broken Lime, Sandy	1043	1092			
Broken Lime	1092	1172			
Lime	1172	1315			
Shale	1315	1340			
Lime	1340	1438			
Shale & Shells	1438	2082			
Lime, Hard	2082	2140			
Lime	2140	2293			
Broken Lime	2293	2329			
Lime, Hard	2329	2387			
Shale, Sticky	2387	2396			
Lime	2396	2454			
Shale & Shells	2454	2480			
Lime	2480	2580			
Shale	2580	2600			
Salt & Shale	2600	2660			
Lime	2660	2767			
Shale & Shells	2767	2830			
Lime	2830	2877			
Lime, Hard	2877	3034			
Lime	3034	3148			
Lime, Hard	3148	3207			
Lime	3207	3560			
Shale & Lime	3560	3608			
Chat & Broken Lime	3608	3631			
Chat	3631	3703			
Chat & Mississippi	3703	3716			
Chat & Lime	3716	3786			
Lime	3786	3830			
Shale & Shells	3830	3857			
Lime & Chert	3857	3896			
Shale & Shells	3896	3994			
Sand & pyrite of iron	3994	3996			
Lime & Shale	3996	4012			
Shale	4012	4022			
<u>Top of Viola</u>		4022			
Lime		4022			4024
Total Depth					4024

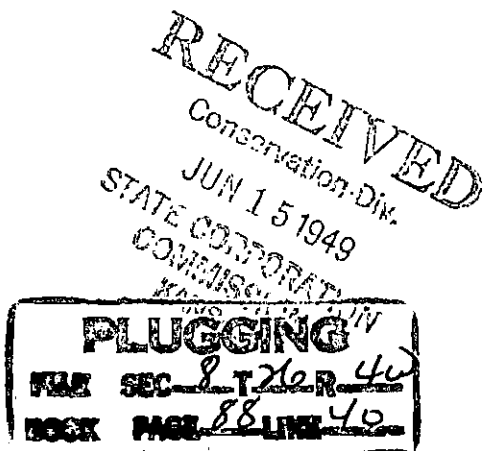

GENERAL OFFICES
120 BROADWAY NEW YORK

AMERADA PETROLEUM CORPORATION

BEACON BUILDING
P. O. BOX 2040

TULSA 2, OKLA.

PRODUCTION DEPARTMENT
W. G. RICKETTS

April 28, 1949

15-155-61006-0000

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita 2, Kansas

Attention: Mr. J. P. Roberts

Gentlemen:

We are enclosing herewith, for your file, corrected
copy of Well Plugging Record on the following well:

John F. Moore Well #2
SE/4 SE/4 SE/4
Section 8-26S-4W
Reno County,
Kansas.

Very truly yours,

AMERADA PETROLEUM CORPORATION

By



General Superintendent

WGR:em

Encl.

RECEIVED

COMM. DIV.

APR 29 1949

STATE CORPORATION
COMMISSION
KANSAS