


R

WELL PLUGGING RECORD

STATE OF KANSAS
 STATE CORPORATION COMMISSION
 Give All Information Completely
 Make Required Affidavit
 Mail or Deliver Report to:
 Conservation Division
 State Corporation Commission
 212 North Market, Insurance Bldg.
 Wichita, Kansas

Kingman County, Sec. 20 Twp. 27 Rge. 10 (E) W (W)
 Location as "NE/CNWxSWx" or footage from lines S/2 NW/4 & N/2 SW/4
 Lease Owner C. V. Phillips Skelly Oil Company
 Lease Name A. J. Conley Well No. 4
 Office Address Hutchinson, Kansas
 Character of Well (completed as Oil, Gas or Dry Hole) Gas
 Date well completed 1-9-42
 Application for plugging filed yes
 Application for plugging approved yes
 Plugging commenced 11-13-60
 Plugging completed 11-15-60
 Reason for abandonment of well or producing formation Depleted.

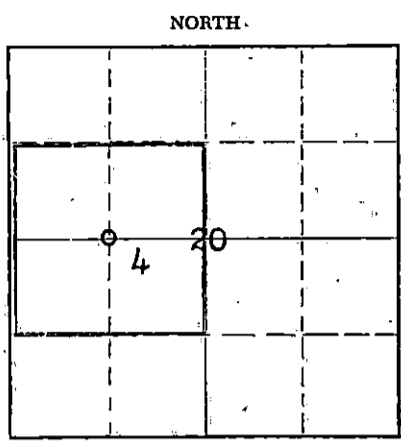

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Fred Hampel
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4230 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	366'	None
				4-1/2"	4241	2300'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 4148' and found it clear. Ran sand from 4148' to 4120' and dumped 4 sacks of cement with dump bailer. Pulled 4 1/2" casing. Mudded hole to 310', set 10' rock bridge to 300' and ran 20 sacks of cement at 300'. Mudded hole to 40', set 10' rock bridge to 30' and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

STATE CORPORATION COMMISSION
 NOV 28 1960

CONSERVATION DIVISION
 Wichita, Kansas

11-28-1960

Name of Plugging Contractor KNIGHT CASING PULLING CO.
 Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
 (Address)

SUBSCRIBED AND SWORN TO before me this 21st day of November, 19 60

Milton J. Volin
 Notary Public.

My commission expires May 20, 1964