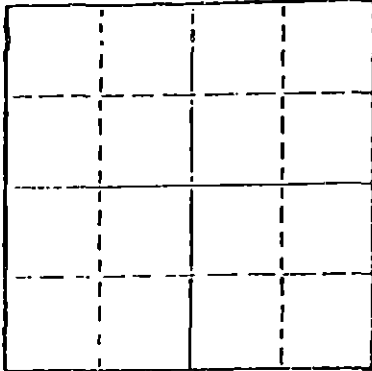


Replug no charge

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Locate well correctly on above
Section Plat

Kingman County. Sec. 20 Twp. 27 Rge. 10 E/W
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{4}$ " or footage from lines
S/2 NW/4 & N/2 SW/4

Lease Owner Northern Natural Gas Co.
Lease Name A. J. Conley Well No. 4
Office Address P.O. Box 88, Lyons, Ks. 67554
Character of Well (Completed as Oil, Gas or Dry Hole)

Gas

Date Well completed January 9, 1942
Application for plugging filed June 20, 1977
Application for plugging approved July 1, 1977
Plugging commenced September 1, 1977
Plugging completed September 6, 1977
Reason for abandonment of well or producing formation

Depleted

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Bill Owen, 408 S. Oak, Pratt, Ks.
Producing formation Arbuckle Depth to top Bottom Total Depth of Well 4230
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	366'	None
				4-1/2"	4241'	2300'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Halliburton mixed and spotted 75 sacks of 50-50 Poz-mix Cement
through drill pipe from 4160 back to 3500'. Spotted 30 sacks
from 350 back to 250'. Spotted 20 sacks from 50 back to surface.

RECEIVED
STATE CORPORATION COMMISSION

SEP 09 1977

CONSERVATION DIVISION
KANSAS
WICHITA

9-9-1977

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pratt Well Service Pratt, Kansas

STATE OF Kansas COUNTY OF Rice, ss.
W. J. Luck (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature)

P.O. Box 88, Lyons, Kansas 67554
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of September, 1977

David L Allen

Notary Public.

My commission expires 11-3-79

