


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

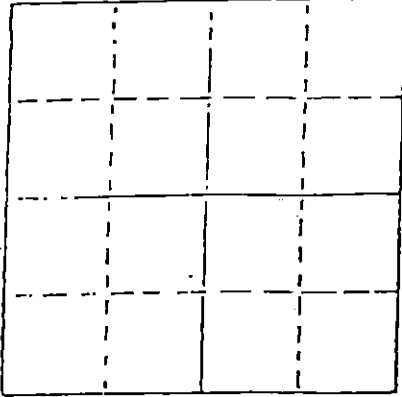

Locate well correctly on above
Section Plot

Pratt County. Sec. 27 Twp. 29 Rge. 13W
Location as "NE/CNW}SW}" or footage from lines
SE/SE/NE
Lease Owner John O. Farmer, Inc.
Lease Name Henry Well No. #1
Office Address Box 352 - Russell, Kansas 67665
Character of Well (Completed as Oil, Gas or Dry Hole)
Oil
Date Well completed
Application for plugging filed
Application for plugging approved
Plugging commenced 10-10-81
Plugging completed 11-23-81
Reason for abandonment of well or producing formation
Depleted
If a producing well is abandoned, date of last production

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Maurice Leslie
Producing formation Depth to top Bottom Total Depth of Well
Show depth and thickness of all water, oil and gas formations. 4624'

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	992'	NONE
				5 1/2"	4624'	3180.99'

Describe in detail the manner in which the well was plugged, indicating where the mud plug was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Dumped sand to 4575' and five (5) sacks cement.
Shot pipe @ 4000', 3800', 3700' 2150', 2020' and 1780'.
Pulled a total of one hundred two (102) joints of 5 1/2" casing.
Squeezed well with fifteen (15) sacks gel, eight (8) sacks hulls, ten (10) sacks gel, three hundred (300) sacks 50/50 pozmix cement with 2% added gel and 3% calcium chloride.

RECEIVED
STATE CORPORATION COMMISSION
NOV 30 1981

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.

STATE OF KANSAS COUNTY OF BARTON, ss.
James W. Rockhold (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well is filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold
James W. Rockhold - Box 698 - Great Bend, Ks. 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 25th day of November, 1981

Ruth Brack
Notary Public.

commission expires



DRILLERS LOG

HENRY NO. 1

CASING RECORD: OPERATOR: John O. Farmer, Inc. DESCRIPTION:
10-3/4" @ 264' CONTRACTOR: Sage Drilling Co. SE SE NE
w/225 sax cement COMMENCED: November 12, 1972 Sec. 27-29S-13W
Pratt Co., Kansas
TOTAL DEPTH: COMPLETED: November 24, 1972 ELEVATION: 1840KB
4625'

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand	0	175	
Red Bed	175	265	
Shale	265	630	
Red Bed	630	990	
Shale	990	1525	
Shale w/Lime streaks	1525	1800	
Lime w/Shale streaks	1800	1885	
Lime & Shale	1885	2526	
Shale & Lime	2526	2673	
Lime & Shale	2673	2970	
Shale & Lime	2970	3200	
Lime & Shale	3200	3435	
Sand & Shale	3435	3620	
Lime & Shale	3620	3900	
Lime	3900	4360	
Shale	4360	4387	
Lime & Chert	4387	4500	
Lime, Shale & Sand	4500	4547	
Sand & Lime	4547	4610	
Lime	4610	4625	

RECEIVED
STATE CORPORATION COMMISSION
SEP 14 1981
CONSERVATION DIVISION
Wichita, Kansas
5 1/2" set @ 4624 1/2'
w/100 sax cement

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SAGE DRILLING CO., INC.

By Clarence Michael
Clarence Michael



Subscribed and sworn to before me this 27th day of November, 1972.

Louise K. Whitted
Louise K. Whitted, Notary Public

My commission expires:
November 26, 1974.