


STATE OF KANSAS
CONSERVATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD



Locate well correctly on above
Section Plat

Ford County, Sec. 11 Twp. 27S Rge. 22 W (E) (W)
Location as "NE/CNW&SW" or footage from lines C NW NW
Lease Owner J. Mark Richardson
Lease Name Nettie Dean Well No. 2
Office Address 200 O.W. Garvey Bldg. Wichita, Kan. 67202
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed July 1 19 73
Application for plugging filed June 20 19 74
Application for plugging approved June 26 19 74
Plugging commenced 7-5 19 74
Plugging completed 7-19 19 74
Reason for abandonment of well or producing formation Dry
If a producing well is abandoned, date of last production Sept. 19 73
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Edgar Eves
Producing formation Mississippi Depth to top 5000 Bottom 5020 Total Depth of Well 5023
Show depth and thickness of all water, oil and gas formations. Cherokee 4950 to 4970


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	536	0
				4 1/2	5023	2530

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped 35 sack cement plug to 4450 feet. Filled hole with mud. Shot casing 4115; 3760, 2860 2530. Pulled 2530 feet casing. Built rock bridge 515-25. Dump 3 yards ready mix cement to 415 to 515. Built rock bridge 60 to 70 ft. Capped with 1 yard cement.

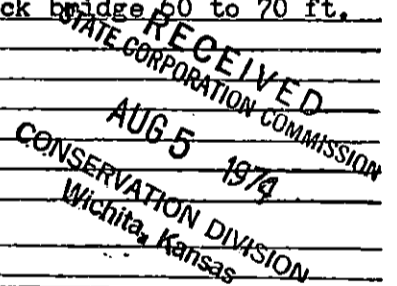

Name of Plugging Contractor Allied Cement Co.
Address Kiowa, Kansas
(If additional description is necessary, use BACK of this sheet)

STATE OF Kansas COUNTY OF Sedgwick
J. Mark Richardson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. Mark Richardson
J. Mark Richardson 200 O.W. Garvey Bldg.
Wichita, Kan.
(Address)

Subscribed and sworn to before me this 29 day of July, 19 74



My commission expires November 4, 1977

Mary Ann Schell
Notary Public.

GABBERT-JONES, INC.
 WICHITA, KANSAS
 DRILLERS' WELL LOG

RECEIVED
 STATE CORPORATION COMMISSION
 JUN 26 1974
 CONSERVATION DIVISION
 Wichita, Kansas

NETTIE DEAN #2
 C NW NW
 200' S Sec, 11-27S-22W
 Ford County, Kansas

Commenced: July 2, 1973
 Completed: July 17, 1973

OPERATOR: J. MARK RICHARDSON

Depth From	To	Formation	Remarks
0	100	Surface clay-sand-pyrite	Ran 12 jts of used 32# 8 5/8" csg. set @ 533' cemented w/375 sks common, 2% Gel, 3% CC. P.D. @ 1:30 PM 7/3/1973
100	536	Shale	
536	900	Shale & sand	
900	927	Anhydrite	
927	1395	Shale - sand-redbed	
1395	1707	Shale-redbed	
1707	2440	Shale	
2440	2700	Shale-lime	
2700	3150	Lime-shale	
3150	3180	Lime	
3180	3274	Lime & shale	Ran 158 jts of 4 1/2" csg. set @ 5022' cemented w/150 sks common, 18% Salt. P.D. @ 3:30 PM 7/17/1973.
3274	3385	Lime	
3385	3607	Lime & shale	
3607	4975	Lime	
4975	5010	Lime & chert	
5010	5020	Lime	
5020	TD		

I, James S. Sutton, II, certify this is a correct copy of the Drillers' Log for the well drilled in the C NW NW, Section 11-27S-22W, Ford County, Kansas, to the best of my knowledge and belief.

James S. Sutton II
 James S. Sutton, II

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State on this 19th day of July, 1973, personally appeared James S. Sutton, II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

Marjorie Hall
 Marjorie Hall, Notary Public

My commission expires
 November 29, 1975

