


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Pratt County, Sec. 6 Twp. 27 Rge. 12 (E) (W)
Location as "NE/CNW/SW" or footage from lines SE NE NW
Lease Owner Terra Resources, Inc.
Lease Name McFadden "G" Well No. 2
Office Address Drawer G, Great Bend, Ks. 67530
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 1-9 19 52
Application for plugging filed 4-24 19 74
Application for plugging approved 4-25 19 74
Plugging commenced 6-3 19 74
Plugging completed 6-12 19 74
Reason for abandonment of well or producing formation Uneconomical

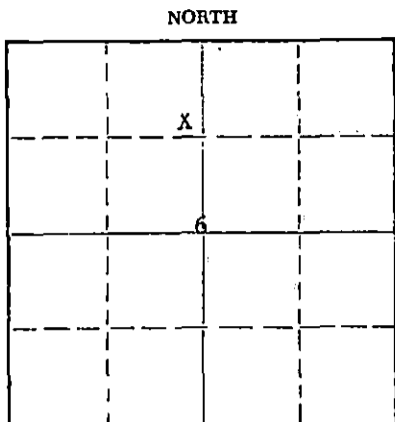

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 5-16 19 66
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation Simpson Depth to top 4222 Bottom 4257 Total Depth of Well 4260 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	461	0
				5 1/2	4258	1936

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Spotted 1 bbl fresh water on sand plug at 4225'. Dumped 4 sacks cement down 5 1/2" casing. Top of cement at 4198'. Shot pipe off at 1947'. Pulled freed casing. Bailed hole down to 100'. Cut off braden head and welded on slip collar. Pumped 10 sacks gelled water containing 3 sacks cottonseed hulls. Filled casing with 125 sacks cement (6% gel). Shut in pressure 400 psi. Checked top plug with wireline after 48 hours. Top of cement at 160' from surface. Filled casing to surface with 1 yd Ready-mix cement. WOC. Cut casing off below ground level and capped. Plugging complete.

RECEIVED
STATE CORPORATION COMMISSION
JUN 17 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Kincaid Well Servicing Co.
Address Box 276, Ellinwood, Ks.

STATE OF Kansas, COUNTY OF Barton, ss.
C. E. McCartney (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. E. McCartney
Drawer G, Great Bend, Ks. 67530 (Address)

SUBSCRIBED AND SWORN to before me this 14th day of June 19 74
LEROY DIETZ
STATE NOTARY PUBLIC
Barton County, Kansas
My Comm. Expires Dec. 7, 1976
Notary Public.

My commission expires 12-7-76

McFadden #20
Owner: Cooperative Refinery Assoc.
Contractor: Earl F. Wakefield

SE NE NW 6-27-12
Pratt County, Kansas
Casing: 461' of 3 5/8"
4250' of 5 1/2"

Elevation 1888 D.F.

Surface Sand	45
Sand & Clay	210
Red Bed & Shale	370
Red Bed & Shells	675
Red Bed & Blue Shale	890
Red Bed & Shale	980
Shale & Shells	1710
Shale & Lime	1935
Shale & Shells	2025
Shale & Lime	2235
Shale	2305
Shale & Lime	2900
Lime & Shale	2965
Shale & Lime	3076
Lime & Shale	3160
Shale & Lime	3278
Lime & Shale	3540
Shale & Lime	3680
Lime & Shale	4054
Shale & Lime	4076
Mississippi Lime	4094
Lime & Shale	4149
Chert, Lime & Shale	4182
Cherty Lime & Shale	4208
Sand	4260
Total Rotary Depth	4260

RECEIVED
STATE CORPORATION COMMISSION
APR 25 1974
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) SS.
COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct copy of the log of the McFadden #20 well located SE NE NW 6-27-12, Pratt County, Kansas.

Earl F. Wakefield

Subscribed and sworn to before me this 15th day of December, 1951.

E. James Gaffney

My Commission Expires: 12-23-54