


15-155-02831-0500

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Reno County, Sec. 23 Twp. 26 S Rge. (E) 9 (W)  
Location as "NE/CNW/SW" or footage from lines Ctr. NW/4 NW/4  
Lease Owner Edwin G. Bradley  
Lease Name Frampton Unit Well No. 1  
Office Address 826 Union Center, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry  
Date well completed May 18 19 59  
Application for plugging filed May 18 19 59  
Application for plugging approved May 18 19 59  
Plugging commenced May 18 19 59  
Plugging completed May 18 19 59  
Reason for abandonment of well or producing formation Dry

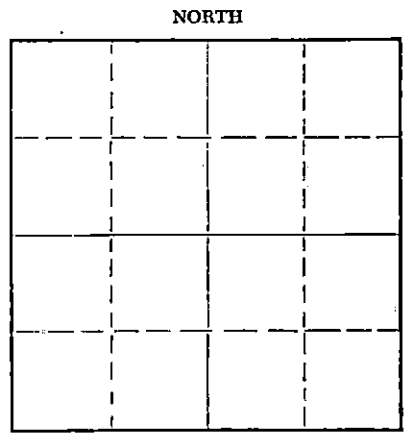

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well J. A. Gilliland  
Producing formation Depth to top Bottom Total Depth of Well 3920 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	298'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with mud to 270 ft., set plug at 270 ft. with 18 sx. cement and 1/4 sk. hulls, filled with mud to 30 ft., set plug at 30 ft. with 1/4 sk. hulls and cemented to bottom of cellar.

RECEIVED  
STATE CORPORATION COMMISSION

MAY 28 1959

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Messman-Rinehart Oil Company  
Address 518 Petroleum Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
J. A. Gilliland (employee of contractor) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. A. Gilliland  
518 Petroleum Building, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 25th day of May, 19 59

My commission expires December 1, 1960

Barbara J. Scott, Notary Public.

PLUGGING  
FILE SEC. 23 T. 26 R. 9W  
BOOK PAGE 41 LINE 2

15-155-02031-0000

NO. 1 FRAMPTON UNIT

Well Record:

Location: Ctr. NW/4 NW/4  
Section 23-26S-9W  
Reno County, Kansas

Commenced: May 7, 1959

Completed: May 18, 1959

Operator: Edwin G. Bradley  
825 Union Center  
Wichita, Kansas

Elevation: 1671' K/B

Production: D & A

Contractor: Messian-Rinehart Oil Company  
518 Petroleum Building  
Wichita, Kansas

Casing Record: 8-5/8" @ 293' w/210 wt. cas.

\*\*\* LOG \*\*\*

Clay	70
Sand	135
Red Bed	400
Red Bed & Shale	1165
Shale & Shells	1175
Anhydrite	1230
Shale & Shells	1300
Lime & Shale	1610
Lime	1918
Shale & Lime	2160
Shale	2400
Lime & Shale	2520
Shale & Lime	2725
Lime & Shale	3420
Lime	3720
Lime & Shale	3880
Lime	3884
Chert	3912
Lime & Shale	3920 R.T.O.

Sample Tops:

3140 - Hoebner (-1469)  
 3308 - Brown Lime (-1637)  
 3340 - Lansing (-1669)  
 3884 - Mississippian (-2213)

The undersigned, MESSIAN-RINEHART OIL COMPANY, hereby certifies that the above log is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

MESSIAN-RINEHART OIL COMPANY

By: J. A. Gilliland  
J. A. Gilliland

Subscribed and sworn to before me this 26th day of May, 1959

Barbara J. Scott  
Barbara J. Scott, Notary Public

My Commission Expires: December 1, 1960

RECEIVED  
STATE CORPORATION COMMISSION

MAY 28 1959

CONSERVATION DIVISION  
Wichita, Kansas

PLUGGING  
 FILE SEC. 23 T. 26 R. 9 W.  
 BOOK PAGE 41 LINE 2