


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

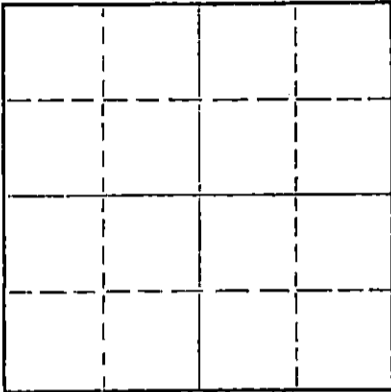

Locate well correctly on above
Section Plat

Kiowa County. Sec. 5 Twp. 27 Rge. 20 (E) (W) X
Location as "NE/CNWxSWx" or footage from lines C/NE/NE
Lease Owner Mull Drilling Company
Lease Name Einsel "H" Well No. 1
Office Address Box 328 Attica, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19 72
Application for plugging filed August 21 19 72
Application for plugging approved 19 72
Plugging commenced August 23 19 72
Plugging completed August 30 19 72
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4843 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	577	None
				4 1/2	4827	3620.62'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Dumped 43' sand. Dumped 4 sacks cement. Shot casing at 4230', 4030' and 3610'. Pulled a total of 111 jts. of 4 1/2" casing. Built a rock bridge at 300 ft. and dumped 35 sacks cement. Mudded hole and built a rock bridge 40 ft. Capped well with 15 sacks cement.


RECEIVED
STATE CORPORATION COMMISSION

9-14-72 SEP 14 1972

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rockhold Engineering, Inc.
Address Box 698 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) James W. Rockhold
Box 698 Great Bend, Kansas 67530
James W. Rockhold (Address)

Subscribed and sworn to before me this 13th day of September, 1972

Cathy Miller
Cathy Miller Notary Public.

My commission expires September 30, 1975

DRILLER'S LOG

COMPANY: WALTERS DRILLING CO. & MULL DRILLING COMPANY
400 Insurance Building
Wichita, Kansas 67202

WELL NAME: EINSEL 'H' #1
C NE NE SEC. 5-27S-20W
KIOWA COUNTY, KANSAS

CONTRACTOR: WALTERS DRILLING CO.
400 INSURANCE BUILDING
WICHITA, KANSAS 67202

ROTARY DRILLING COMMENCED: SEPTEMBER 29, 1967
ROTARY DRILLING COMPLETED: OCTOBER 11, 1967

ELEVATION: 2275 KB

CASING RECORD: 8 5/8" @ 577' w/ 275 sks.

LOG

0 - 150	Sand and Clay
150 - 275	Sand, Shale and Shells
275 - 574	Shale
574 - 580	Sand
580 - 720	Sand - Redbed
720 - 735	Blaine
735 - 1060	Red Bed, Shale and Shells
1060 - 1281	Shale
1281 - 1300	Anhydrite
1300 - 1585	Shale
1585 - 2255	Shale and Shells
2255 - 2520	Lime and Shale
2520 - 2655	Broken Lime
2655 - 3230	Lime and Shale
3230 - 3395	Shale
3395 - 3520	Shale and Lime Streaks
3520 - 3740	Shale and Lime
3740 - 3935	Shale
3935 - 4345	Shale and Lime
4345 - 4710	Lime
4710 - 4745	Lime and Shale
4745 - 4816	Lime
4816 - 4843	Core
<u>4843</u>	<u>Rotary Total Depth</u>


RECEIVED
STATE CORPORATION COMMISSION
11-22-1972
CONSERVATION DIVISION
Wichita, Kansas

The undersigned, Robert F. Walters, hereby certifies, in behalf of said company that the above log is a true and correct log of the formations encountered in drilling the above well as reflected by the Daily Drilling Reports.

WALTERS DRILLING CO.

BY 
ROBERT F. WALTERS, Partner

Subscribed and sworn to before me
this 17th day of October, 1967.


Juanita M. Green, Notary Public

My Commission Expires: October 4, 1971

