

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
266 N. Main St., Ste. 220  
Wichita, KS 67202-1513

API Well Number: 15-077-21940-00-00  
Spot: SESW Sec/Twnshp/Rge: 1-33S-6W  
660 feet from S Section Line, 1980 feet from W Section Line  
Lease Name: Well #: 1-1  
County: HARPER Total Vertical Depth: 4969 feet

Operator License No.: 34192  
Op Name: SANDRIDGE EXPLORATION AND PRO  
Address: 123 ROBERT S. KERR AVE  
OKLAHOMA CITY, OK 73102

String	Size	Depth (ft)	Pulled (ft)	Comments
COND	20	120		10 SX
PROD	5.5	4952	2024	330 SX
SURF	8.63	625		420 SX

Well Type: OIL UIC Docket No: Date/Time to Plug: 08/31/2015 12:00 AM  
Plug Co. License No.: 33338 Plug Co. Name: ORR ENTERPRISES, INC.  
Proposal Rcvd. from: STEVE JOHNSON Company: SANDRIDGE EXPL Phone: (405) 429-5000

Proposed Plugging Method: CIBP # 3480' WITH 10 SXS. 50 SX 1350', 50 SX 690', CIRCULATE @ 250'.

Plugging Proposal Received By: STEVE VANGIESON WitnessType: PARTIAL  
Date/Time Plugging Completed: 09/02/2015 6:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

THE PERFS WERE COVERED WITH CIBP AT 3480'. RAN TUBING TO BP & LOADED HOLE WITH MUD. SPOTTED 10 SXS THRU TUBING ON BP. RECOVERED 2024' OF 5.5 & LAYED DOWN. RAN TUBING TO 1350' & SPOTTED 50 SXS CEMENT. PULLED TUBING TO 691' & SPOTTED 50 SXS CEMENT. PULLED TUBING TO 250' & CIRCUALTE CEMENT TO SURFACE WITH 75 SXS CEMENT.

Perfs:

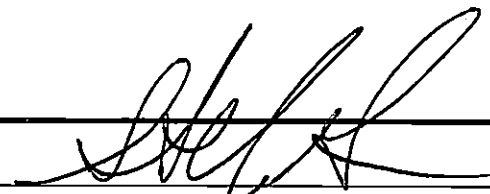
Top	Bot	Thru	Comments
3538	3613	CSG	

KCC WICHITA  
SEP 15 2015  
RECEIVED

Remarks: ORR ENTERPRISES CLASS C CEMENT

Plugged through: TBG

District: 02

Signed   
(TECHNICIAN)

✓ SK